
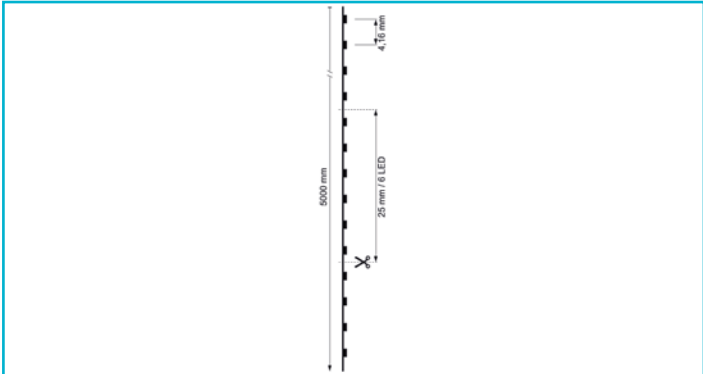


Strip light
Power, SMD, 24 V-20 W, 2,700 K, 5 m

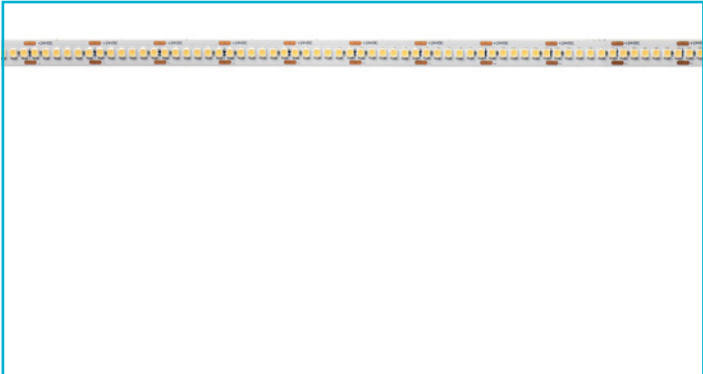

- Special features
- high-performance adhesive 3M 9448A

Housing Material	Copper
Housing Color	White
Mounting Location	Inside
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant voltage
Rated Input 1m	18.5 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage	24 V/DC
Power Supply Unit incl.	No
Connection Cable Primary	Yes
Primary Connection	With free strand / conductor ends
Primary Cable Length	1 m
Connection Cable Secondary	Yes
Secondary Connection	Open cables
Secondary Cable Length	1 m
Dimmable	Yes
Control	Dimmable via optional controller
Number of Channels	1
Light Source	LED, Light source not changeable
Lightcolor	Warm white (WW)
Color Temperature	2700 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Angle of Reflection	120 Degree
Distribution Characteristic 120°	DLS
Luminous Flux 1m	1215 lm
Luminous Efficiency 1m	65.68 lm/W
LED/Meter	240

Segment Length	25 mm
Segment LED Quantity	6
LED Distance	4.16 mm
Bending Radius min.	20 mm
Total Length to be Operated max.	5 m
Length	5000 mm
Width	10 mm
Height	2 mm
Product weight	128 g
Working Temperature	-15 to 50 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 20
Life Time L70 / B50	60000 h
Switching Cycles	30000
Power Consumption	19 kWh/1000h
EEI	G

