
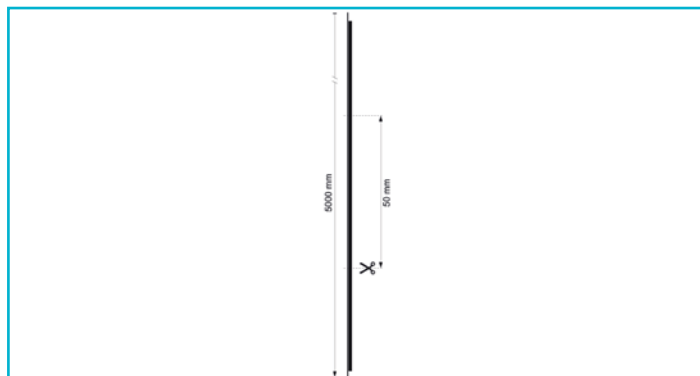


Strip light**Standard, COB, 24 V-12 W, 3,000 K, 5 m****Special features**

- high-performance adhesive 3M VHB5604A

Housing Material	Copper	Segment Length	50 mm
Housing Color	White	Segment LED Quantity	24
Mounting Location	Inside	LED Distance	2.08 mm
Protection Class	Protection class III/safety extra-low voltage	Bending Radius min.	50 mm
Operating Mode	Constant voltage	Total Length to be Operated max.	5 m
Rated Input 1m	12.5 W	Length	5000 mm
Rated Power Consumption Standby	0.5 W	Width	10 mm
Rated Input Voltage	24 V/DC	Height	2 mm
Power Supply Unit incl.	No	Product weight	148 g
Connection Cable Primary	Yes	Working Temperature	-15 to 50 °C
Primary Connection	With free strand / conductor ends	Storage Temperature	-10 to 60 °C
Primary Cable Length	1 m	IP Protection Class	IP 20
Connection Cable Secondary	Yes	Life Time L70 / B50	60000 h
Secondary Connection	Open cables	Switching Cycles	30000
Secondary Cable Length	1 m	Power Consumption	13 kWh/1000h
Dimmable	Yes	EEI	F
Control	Dimmable via optional controller		
Number of Channels	1		
Light Source	LED, Light source not changeable		
Lightcolor	Warm white (WW)		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	90		
Rated Angle of Reflection	120 Degree		
Distribution Characteristic 120°	NDLS		
Luminous Flux 1m	1120 lm		
Luminous Efficiency 1m	89.6 lm/W		
LED/Meter	480		

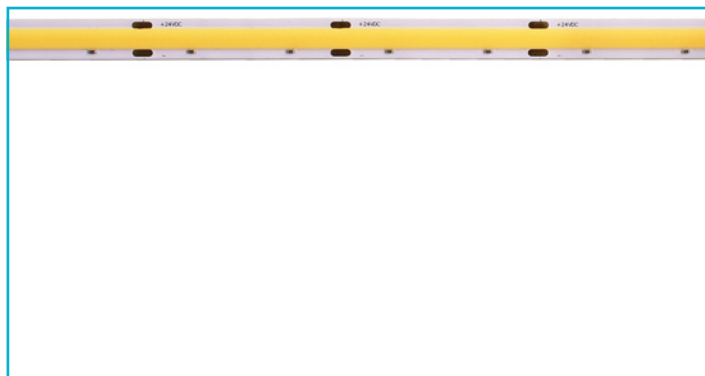