


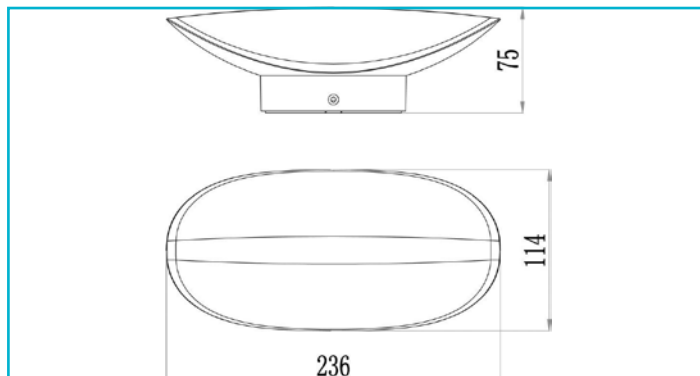

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Plastic
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Rated Input	12.7 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	925 lm
Luminous Efficiency	72.8 lm/W
Rated Angle of Reflection	125 Degree
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	1
Light characteristics	Direct, Indirect
Light direction	Top, Front, Below

Length	236 mm
Width	75 mm
Height	114 mm
Base height	24 mm

Base H x Ø	24 x 97 mm
Base diameter	97 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 54

Life Time L70 / B50	30000 h
Switching Cycles	100000
Power Consumption	13 kWh/1000h
EEL	G

