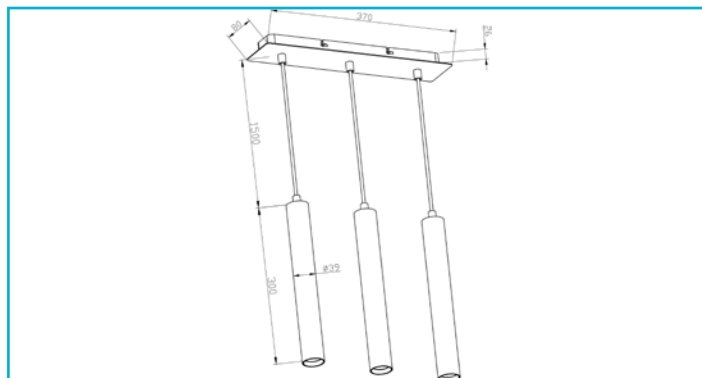


Pendant lamp
Slim, 15 W, DIM, 2,700 K, black


SLIM series lights include single-luminaire and triple-luminaire pendant lamps, recessed ceiling lights and matching pendant lamps for the DEKO-LIGHT current track system. The die-cast aluminium light body is the same size for all variants [300 × 39 mm]. Several SLIM models therefore can also be combined with each other in larger spaces. The pendant lamps for ceiling installation with max. 180 cm suspended mounting are available in a one or three-luminaire variant; three-luminaire variant both with long or round base depending on the arrangement of the lights.

While the fixed SLIM models create a pleasant warm white light in dining rooms, reading nooks and more, the single-luminaire SLIM current

Special features

- Extra-soft fabric cable
- Glare-free, due to low UGR value [<19]
- Slim design at just 39 mm in diameter
- Incl. silver-coloured reflector ring

Housing Material	Aluminium
Housing Color	Black
Material of Lens	PMMA
Colour of Lens	Transparent
Surface Structure of Lens	Structured
Halogen free	No
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation


Light direction	Below
Height	300 mm
Diameter	39 mm
Base length	370 mm
Base L x W x H	370 x 80 x 26 mm
Base width	80 mm
Base height	26 mm
Pendulum Length max.	1800 mm

Protection Class	Protection class I/ protective grounding
Rated Input	15 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 65 °C
IP Protection Class	IP 20
Max. units per MCB B10	76 PCS
Max. units per MCB B16	122 PCS
Max. units per MCB C10	76 PCS
Max. units per MCB C16	122 PCS

Light Source	LED, Light source changeable TC
Color Temperature	2700 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	1500 lm
Luminous Efficiency	100 lm/W
Rated Angle of Reflection	24 Degree
UGR	19
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Life Time L70 / B50	50000 h
Switching Cycles	100000
Power Consumption	15 kWh/1000h
Energy Efficiency Class Lightsource	



Light Exit Surfaces	3
Light characteristics	Direct

