


Surface-mounted wall light
Bessma IV, 9.6 W, 3,000 K, dark grey

IP54



Housing Material	Aluminium	Base L x W x H	90 x 12 x 44 mm
Housing Color	Dark grey	Base width	12 mm
Material of Lens	Plastic	Base height	44 mm
Mounting Type	Top mounting	Working Temperature	-20 to 40 °C
Mounting Location	Outside	Storage Temperature	-10 to 60 °C
Mounting Area	Wall installation	IP Protection Class	IP 54
Ultraviolet resistance	Yes	Life Time L70 / B50	30000 h
Protection Class	Protection class I/ protective grounding	Switching Cycles	100000
Rated Input	9.6 W	Power Consumption	10 kWh/1000h
Rated Input Voltage Frequency	100-240 V/AC 50 / 60 Hz	EEI	G
Power Supply Unit incl.	Yes		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	80		
Rated Luminous Flux	580 lm		
Luminous Efficiency	60.4 lm/W		
Rated Angle of Reflection	360 Degree		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Front, Rear, Side		
Length	90 mm		
Width	93.1 mm		
Height	251.8 mm		
Base length	90 mm		

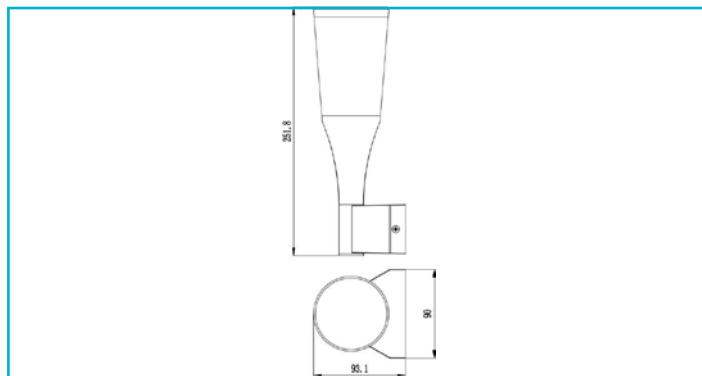