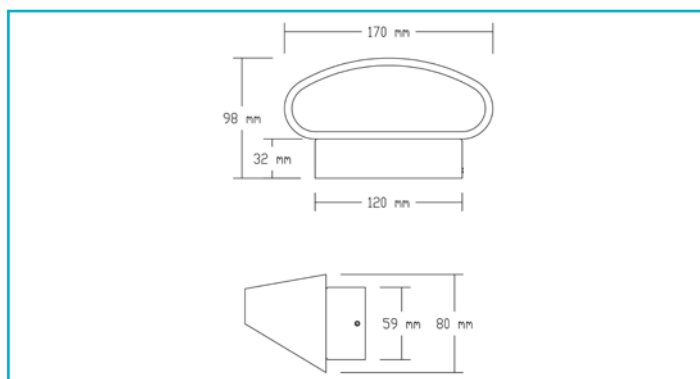
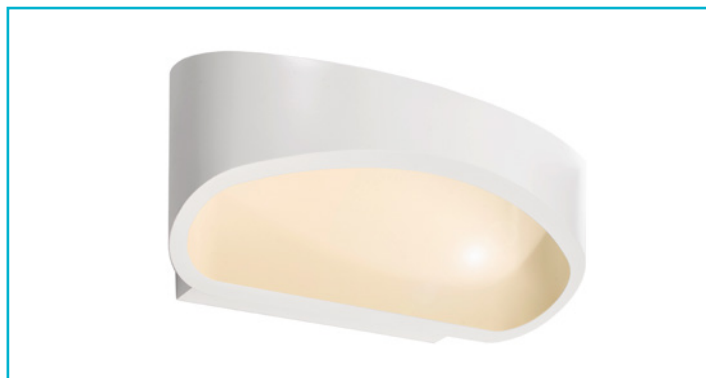


Surface-mounted wall light
Acamar, 6,5 W, DIM, 3,000 K, white


Small, fine, elegant and discreet - The ACAMAR is a light manufactured from high-quality aluminium. The colour reproduction value is over 90, which means high colour authenticity. The design is chic and attractive thanks to its curvature on one side. You can mount the light with the curvature upwards or downwards, depending on your preference. The white paint inside accentuates the warm white light and ensures pleasant scattering upwards and downwards. The outside is highly polished for an incredible shine.

Housing Material	Aluminium
Housing Color	White
Mounting Location	Inside
Protection Class	Protection class I/ protective grounding
Rated Input	6.5 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source changeable TC
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	92
Rated Luminous Flux	500 lm
Luminous Efficiency	56.5 lm/W
Rated Angle of Reflection	105 Degree

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	170 mm
Width	100 mm
Height	98 mm
Base length	120 mm
Base L x W x H	120 x 59 x 32 mm
Base width	59 mm
Base height	32 mm

Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 60 °C
Surface Temperature max.	40 °C
IP Protection Class	IP 20
Inrush Current max.	5 A / 100 µs
Max. units per MCB B10	140 PCS
Max. units per MCB B16	224 PCS
Max. units per MCB C10	166 PCS
Max. units per MCB C16	266 PCS

Life Time L70 / B50	55000 h
Switching Cycles	100000 PCS
Power Consumption	7 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.

