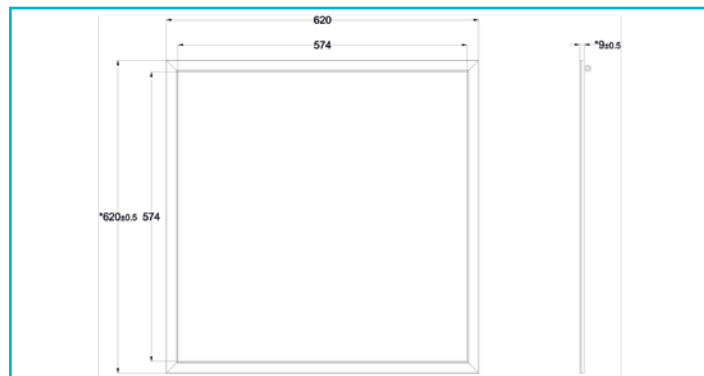


LED panel**Standard Office 625x625 mm, 38 W, 4000 K, white****Special features**

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for pendant mounting
- Suitable for office spaces, reception rooms, hallways
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65
- Microprismatic surface structure

Housing Material	Aluminium
Housing Color	White
Material of Lens	PMMA
Suitable for Computer Workstations	Yes
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant current
Rated Input	38 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage	33-38 V/DC
Rated Current	1050 mA
Power Supply Unit incl.	No
Dimmable	Yes
Control	Dimmable via optional power supply unit
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	90
Rated Luminous Flux	4200 lm
Luminous Efficiency	116.7 lm/W
Rated Angle of Reflection	90 Degree
UGR	19
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct

Light direction	Below
Length	620 mm
Width	620 mm
Height	9 mm
Product weight	2432 g
Working Temperature	-10 to 40 °C
Storage Temperature	-10 to 50 °C
IP Protection Class	IP 40
IK Protection Class	IK03
Life Time L70 / B50	75000 h
Life Time L80 / B10	50000 h
Life Time L80 / B50	60000 h
Switching Cycles	100000
Power Consumption	38 kWh/1000h
EEL	F

