


Surface-mounted wall light

Shoreline Pro Square Up+Down, 7,5 W, 3000/4000 K, DIM, dark grey

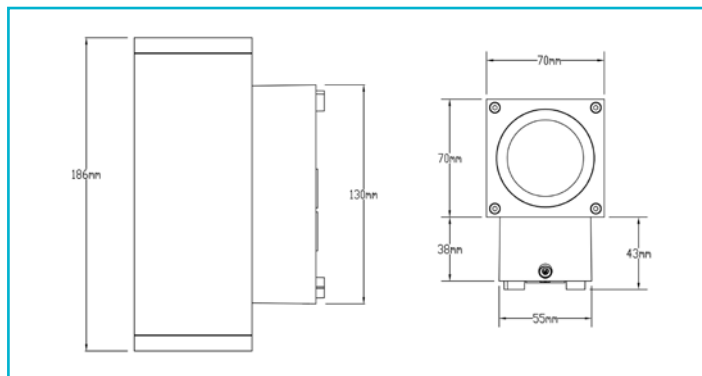

Special features

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Glass
Colour of Lens	Clear
Surface Structure of Lens	Clear
Through Wiring possible	Yes
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Functions	Seawater resistant
Protection Class	Protection class I/ protective grounding
Rated Input	7.5 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Number of Cable Entries	2 PCS
Dimmable	Yes
Control	Trailing-edge dimmer
Motion Detector	No
Voltage range DC	176-250 V/DC

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	4 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	90
Rated Luminous Flux	700/780 lm
Rated Angle of Reflection	30 Degree
UGR	19

Light Exit Surfaces	2
----------------------------	---

Light characteristics	Direct, Indirect
Light direction	Top, Below
Length	70 mm
Width	70 mm
Height	186 mm
Base length	43 mm
Base L x W x H	43 x 55 x 130 mm
Base width	55 mm
Base height	130 mm

Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 60 °C
Surface Temperature max.	36 °C
IP Protection Class	IP 65
IK Protection Class	IK08
Inrush Current max.	5 A / 300 µs
Max. units per MCB B10	35
Max. units per MCB B16	56
Max. units per MCB C10	74
Max. units per MCB C16	118

Life Time L70 / B50	50000 h
Switching Cycles	100000
Power Consumption	8 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.

