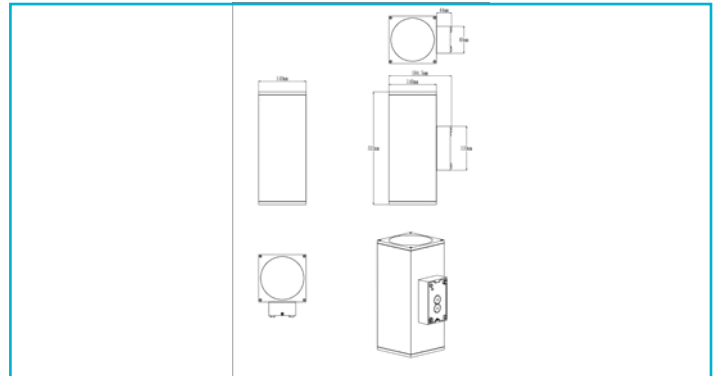


Surface-mounted wall light**Shoreline Pro Square Up+Down, 55 W, DIM 3000/4000 K, dark grey****Special features**

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Glass
Colour of Lens	Clear
Surface Structure of Lens	Clear
Through Wiring possible	Yes
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Functions	Seawater resistant

Protection Class	Protection class I/ protective grounding
Rated Input	55 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Number of Cable Entries	2 PCS
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No
Voltage range DC	176-250 V/DC

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	4 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	90
Rated Luminous Flux	5400/5800 lm
Rated Angle of Reflection	36 Degree
UGR	12

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below
Length	140 mm
Width	140 mm
Height	332 mm
Base length	44.5 mm
Base L x W x H	44.5 x 80 x 130 mm
Base width	80 mm
Base height	130 mm

Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 60 °C
Surface Temperature max.	36 °C
IP Protection Class	IP 65
IK Protection Class	IK08
Inrush Current max.	5 A / 100 µs
Max. units per MCB B10	50
Max. units per MCB B16	80
Max. units per MCB C10	50
Max. units per MCB C16	80

Life Time L70 / B50	50000 h
Switching Cycles	100000
Power Consumption	55 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.

