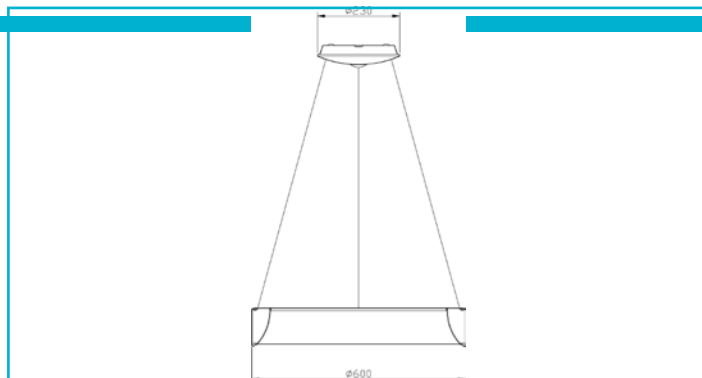


Pendant lamp**Sculptoris 600 mm, 42 W, DIM, 4,000 K, white**

SCULPTORIS series pendant lamps boast an impressive matte visual design and luminous ring. With high luminous intensity and large light emission angle, the series offers flexible applications in many different areas, whether in living areas or for providing imposing lighting solutions to office spaces.

Special features

- Light colour adjustable in two stages
- Circumferential diffuser
- Can be suspended by up to 1,800/3,000 mm [depending on model]

Housing Material	Aluminium
Housing Color	White
Surface structure	Matt
Material of Lens	Plastic
Surface Structure of Lens	Opal
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	42 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	2800 lm
Luminous Efficiency	66.7 lm/W
Rated Angle of Reflection	150 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	1
Light characteristics	Direct, Indirect
Light direction	Top, Below

Height	130 mm
Diameter	600 mm
Base height	65 mm
Base H x Ø	65 x 230 mm
Base diameter	230 mm
Pendulum Length max.	1000 mm

Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04
Life Time L70 / B50	20000 h
Switching Cycles	15000
Power Consumption	42 kWh/1000h
EEI	E

