



Strip light

Standard, COB, 24 V-16 W, RGB + 3000 K, IP67, 5 m


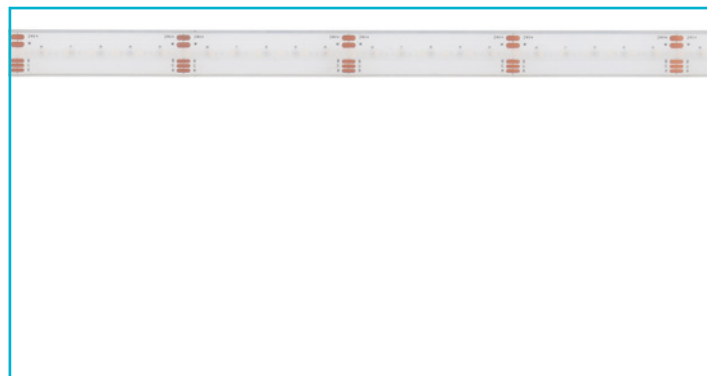


Housing Material	Silicone
Housing Color	White
Mounting Location	Inside, Outside
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant voltage
Rated Input 1m	16 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage	24 V/DC
Power Supply Unit incl.	No
Connection Cable Primary	Yes
Primary Connection	With free strand / conductor ends
Primary Cable Length	0.5 m
Connection Cable Secondary	Yes
Secondary Connection	Open cables
Secondary Cable Length	0.5 m
Dimmable	Yes
Control	Dimmable via optional controller
Number of Channels	4

Light Source	LED, Light source not changeable
Lightcolor	RGB/warm white
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Angle of Reflection	180 Degree
Luminous Flux 1m	800 lm
Luminous Efficiency 1m	49 lm/W
Segment Length	50 mm
LED Distance	1.78 mm

Power Consumption	16 kWh/1000h
EEI	G

Bending Radius min.	50 mm
Total Length to be Operated max.	5 m
Length	5000 mm
Width	14 mm
Height	4.5 mm
Width Hose	14 mm
Height Hose	4.5 mm
Length end cap	10 mm
Width end cap	14 mm
Height end cap	6 mm
Product weight	400 g
Working Temperature	-20 to 50 °C
Storage Temperature	-25 to 60 °C
IP Protection Class	IP 67
Type of IP Protection	Silicone hose
Life Time L70 / B50	36000 h
Life Time L80 / B10	32000 h
Switching Cycles	30000 PCS



Art.-Nr. 840483

Strip light

Standard, COB, 24 V-16 W, RGB + 3000 K, IP67, 5 m

