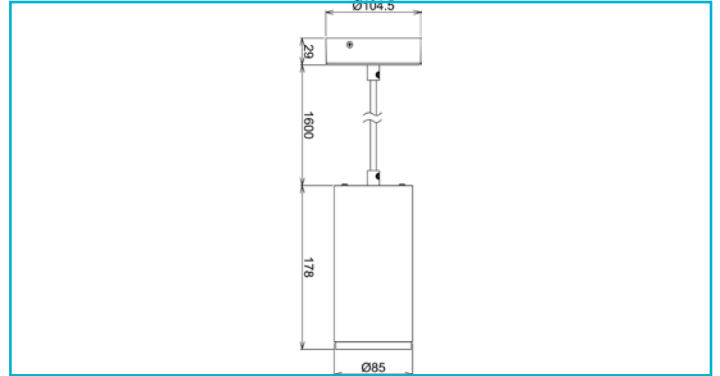


Pendant lamp**Lucea 20 CCT, 15 W, DIM, 3000/4000 K, black**

LUCEA series pendant lights with CCT are available in 10, 15 and 20 W versions and offer up to 2,000 lumens of light output. The maximum suspended mounting is 1,800 mm. Optional lenses can be used to narrow or expand the light emission angle of the individual models. LUCEA lights feature a die-cast aluminium housing.

Special features

- Light colour adjustable in two stages
- Incl. black reflector ring

Housing Material	Aluminium
Housing Color	Black
Material of Lens	PMMA
Halogen free	No
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	15 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	5 SDCM
Colour consistency light source	5 SDCM
CRI (Ra)	90
Rated Luminous Flux	1460/1500 lm
Luminous Efficiency	100 lm/W
Rated Angle of Reflection	36 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	178 mm
Diameter	85 mm
Base height	29 mm
Base H x Ø	29 x 104.5 mm
Base diameter	104.5 mm
Pendulum Length max.	1800 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-20 to 65 °C
IP Protection Class	IP 20
IK Protection Class	IK03
Max. units per MCB B10	74 PCS
Max. units per MCB B16	119 PCS
Max. units per MCB C10	74 PCS
Max. units per MCB C16	119 PCS

Life Time L70 / B50	50000 h
Switching Cycles	100000
Power Consumption	15 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.

