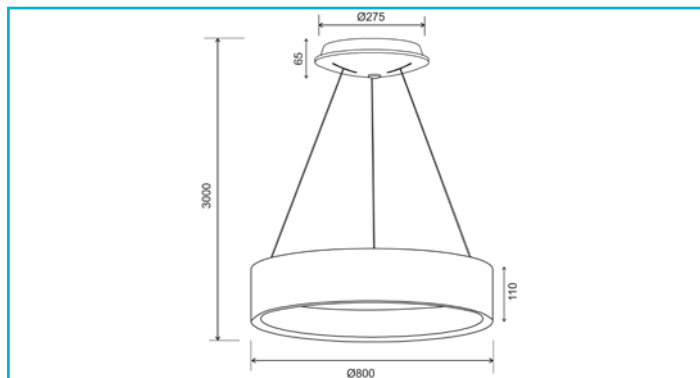


Pendant lamp**Sculptoris 800 mm, 60 W, DIM, 3,000/4,000 K, white**

SCULPTORIS series pendant lamps boast an impressive matte visual design and luminous ring. With high luminous intensity and large light emission angle, the series offers flexible applications in many different areas, whether in living areas or for providing imposing lighting solutions to office spaces.

Special features

- Light colour adjustable in two stages
- Circumferential diffuser
- Can be suspended by up to 1,800/3,000 mm [depending on model]

Housing Material	Aluminium
Housing Color	White
Surface structure	Matt
Material of Lens	Acryl
Surface Structure of Lens	Satined
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	60 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	4100/4200 lm
Luminous Efficiency	70 lm/W
Rated Angle of Reflection	150 Degree
Light Distribution	Symmetric

Light Exit Surfaces	1
Light characteristics	Direct, Indirect
Light direction	Top, Below

Height	110 mm
---------------	--------

Diameter	800 mm
Base height	65 mm
Base H x Ø	65 x 275 mm
Base diameter	275 mm
Pendulum Length max.	3000 mm

Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04
Max. units per MCB B10	17 PCS
Max. units per MCB B16	28 PCS
Max. units per MCB C10	37 PCS
Max. units per MCB C16	59 PCS

Life Time L70 / B50	30000 h
Switching Cycles	20000
Power Consumption	60 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class F.

