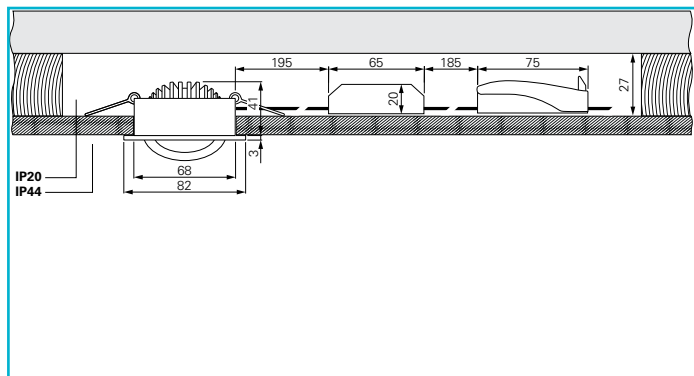


Recessed Spotlight
Dione IP44, 8.5 W, DIM, 3,000 K, nickel

Special features

- Low installation depth
- Splash-proof [downwards after installation]
- Incl. dimmable power supply unit and connection box
- Feed-through wiring possible
- Ideal renovation solution
- Light and power supply unit with intermediate connector


Housing Material	Aluminium
Housing Color	Nickel
Colour of Lens	White
Through Wiring possible	Yes
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class II/ protective insulation
Rated Input	8 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Primary Connection	Connection box IP20
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	5 SDCM
Colour consistency light source	5 SDCM
CRI (Ra)	80
Rated Luminous Flux	800 lm
Luminous Efficiency	94.1 lm/W
Rated Angle of Reflection	36 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	30 Degree
Light Exit Surfaces	1
Light characteristics	Direct

Light direction	Below
Height	44 mm
Diameter	82 mm
Installation Depth	41 mm
Required Installation Depth	27 mm
Mounting Surface Thickness	9-13 mm
Cut Out Diameter	68 mm
Product weight	173 g
Working Temperature	-20 to 40 °C
Storage Temperature	-20 to 40 °C
IP Protection Class	IP 20, IP 44
Inrush Current max.	5 A / 100 µs
Max. units per MCB B10	90
Max. units per MCB B16	145
Max. units per MCB C10	100
Max. units per MCB C16	160

Life Time L70 / B50	50000 h
Switching Cycles	25000



Art.-Nr. 565397



Recessed Spotlight
Dione IP44, 8.5 W, DIM, 3,000 K, nickel

Power Consumption	9 kWh/1000h
EEI	E