


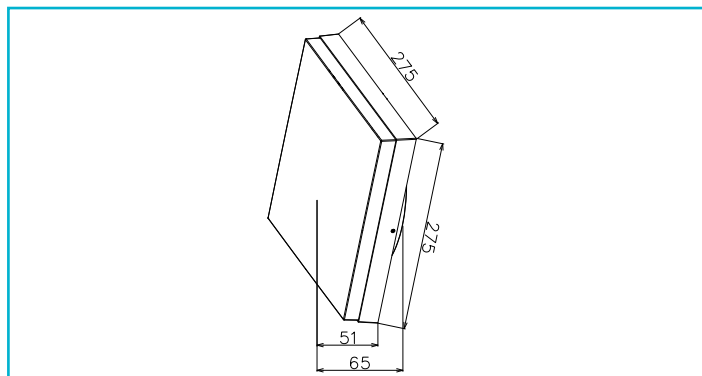

The CASA house number light has space for up to four digits and/or letters each 10 cm high, ensuring house numbers can be easily read. With a configurable twilight switch, the wall light automatically adjusts to the ambient brightness. The light colour can also be adjusted in two stages (3,000 K/4,000 K).

Multiple cable entries and the option of feed-through wiring mean that installation is simple and flexible. Anti-theft protection also prevents unauthorised removal.

Special features

- Space for four digits and letters each 10 cm high
- Adjustable daylight sensor
- Adjustable light colour 3,000/4,000 K
- Multiple cable entries incl. feed-through wiring
- Easy and quick mounting with anti-theft protection
- Set of number/letter stickers optionally available

Housing Material	PP - Polypropylene
Housing Color	Black
Surface structure	Matt
Colour of Lens	White
Surface Structure of Lens	Opal
Through Wiring possible	Yes
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class II/ protective insulation
Rated Input	3 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	200-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
CRI (Ra)	80
Rated Luminous Flux	250/260 lm
Luminous Efficiency	86.7 lm/W
Rated Angle of Reflection	120 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Front

Length	275 mm
---------------	--------

Width	275 mm
Height	64 mm
Base height	14 mm
Base H x Ø	14 x 245 mm
Base diameter	245 mm
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 60 °C
IP Protection Class	IP 54
IK Protection Class	IK08
Max. units per MCB B10	95 PCS
Max. units per MCB B16	152 PCS
Max. units per MCB C10	95 PCS
Max. units per MCB C16	152 PCS

Life Time L70 / B50	50000 h
Switching Cycles	100000
Power Consumption	3 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class C.

