


Art. no. 707230

Trunking system Sanotrunk Universal 90 degree, 70 W,
DALI, 4000 K, White

 **DEKO LIGHT**

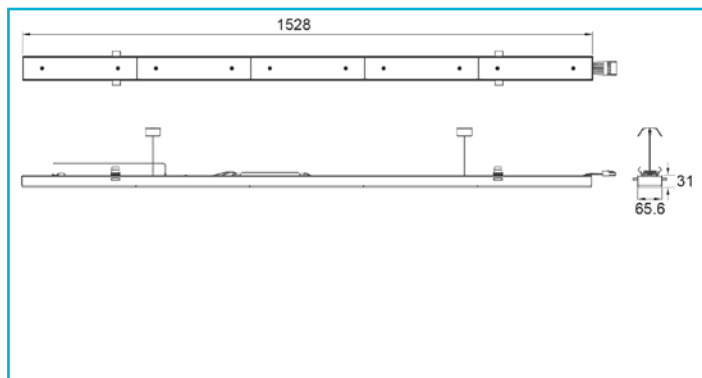

Special features

- Renovation solution for T5/T8 light strip systems
- Continued use of existing mounting rails possible
- Easy, quick and reliable installation
- Compatible with leading manufacturers
- Eligible for BEG German federal funding for energy-efficient buildings
- Can run on emergency power
- DALI versions with Intelli-Data: Dali parts 251, 252, 253 for lighting, energy and maintenance data

Housing Material	Aluminium
Housing Color	White
Material of Lens	PMMA
Halogen free	Yes
Functions	Leuchte kann mit Gleichstrom aus einer Zentralbatterie eines Notstromsystems betrieben werden., Korridorfunktion mit extern verbauten DALI-Sensor., Phase switch

Protection Class	Protection class I/protective grounding
Rated Input	70 W
Rated Power Consumption Standby	0.3 W
Rated Input Voltage	198-264 V/AC
Dimmable	Yes
Control	DALI 2 / DT6, Push-Dim
Voltage range DC	168-275 V/DC
Voltage range emergency lighting	186-250 V/DC
EOFI	15 %

Light Source	LED, Light source changeable TC
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	12200 lm
Luminous Efficiency	174 lm/W
Rated Angle of Reflection	90 Degree
UGR	25

Light characteristics	Direct
Light direction	Below

Length	1528 mm
Width	65.6 mm
Height	31 mm
Product weight	2059 g
Working Temperature	-25 to 50 °C
Storage Temperature	-25 to 85 °C
IP Protection Class	IP 40
IK Protection Class	IK04

Life Time L70 / B50	130000 h
Life Time L80 / B10	72000 h
Life Time L80 / B50	85000 h
Switching Cycles	50000
Power Consumption	70 kWh/1000h

