



Strip light
Standard, COB, 24 V-15 W, 2700-6500 K, IP67, 5 m

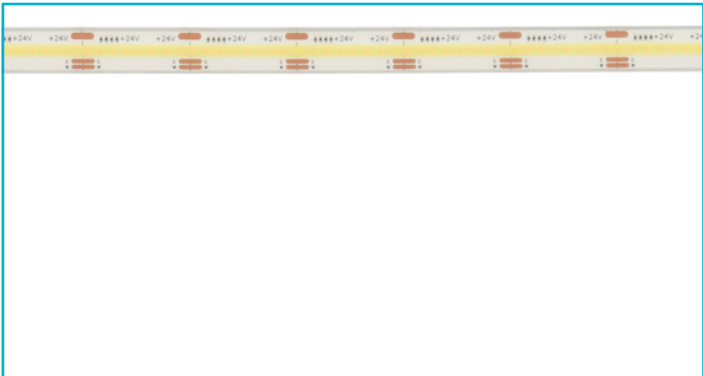

Housing Material	Silicone
Housing Color	White
Mounting Location	Inside, Outside
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant voltage
Rated Input 1m	15 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage	24 V/DC
Power Supply Unit incl.	No
Connection Cable Primary	Yes
Primary Connection	With free strand / conductor ends
Primary Cable Length	0.5 m
Connection Cable Secondary	Yes
Secondary Connection	Open cables
Secondary Cable Length	0.5 m
Dimmable	Yes
Control	Dimmable via optional controller
Number of Channels	2
Light Source	LED, Light source not changeable
Lightcolor	Warm white/cold white
Colour Temperature	2700-6500 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Angle of Reflection	180 Degree
Luminous Flux 1m	1300 lm
Segment Length	27.8 mm
LED Distance	1.73 mm

Bending Radius min.	50 mm
Total Length to be Operated max.	5 m
Length	5000 mm
Width	12 mm
Height	4.5 mm
Width Hose	12 mm
Height Hose	4.5 mm
Length end cap	10 mm
Width end cap	14 mm
Height end cap	6 mm
Product weight	350 g
Working Temperature	-20 to 50 °C
Storage Temperature	-25 to 60 °C
IP Protection Class	IP 67
Type of IP Protection	Silicone hose
Life Time L70 / B50	54000 h
Life Time L80 / B10	47000 h
Switching Cycles	30000 PCS
Power Consumption	15 kWh/1000h



EEI F

Art.-Nr. 840481

Strip light

Standard, COB, 24 V-15 W, 2700-6500 K, IP67, 5 m

