


Surface-mounted wall light
Linear I single 500 mm, 14 W, 3,000 K, dark grey

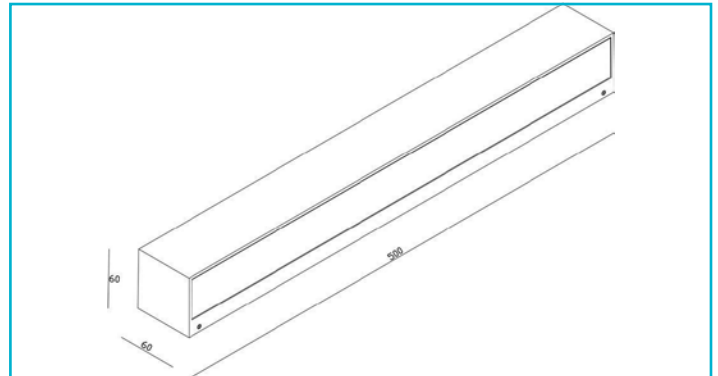

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Glass
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
UV resistance	Yes
Functions	Nightsaver
Protection Class	Protection class I/ protective grounding
Rated Input	14 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	1230 lm
Luminous Efficiency	87.9 lm/W
Rated Angle of Reflection	100 Degree
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	500 mm
Width	60 mm
Height	60 mm

Base length	493 mm
Base L x W x H	493 x 53 x 15 mm
Base width	53 mm
Base height	15 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 65
IK Protection Class	IK05
Max. units per MCB B10	31 PCS
Max. units per MCB B16	50 PCS
Max. units per MCB C10	50 PCS
Max. units per MCB C16	80 PCS

Life Time L70 / B50	30000 h
Switching Cycles	10000
Power Consumption	14 kWh/1000h
EEL	F

