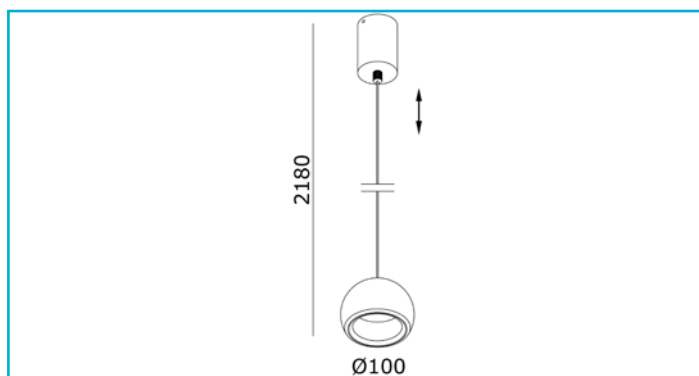


Pendant lamp
Heze I, 6.5 W, 3,000 K, white


Housing Material	Aluminium
Housing Color	White
Surface structure	Matt
Material of Lens	Plastic
Surface Structure of Lens	Opal
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	6.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	340 lm
Luminous Efficiency	52.3 lm/W
Rated Angle of Reflection	90 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1 PCS
Light characteristics	Direct
Light direction	Below

Diameter	100 mm
Base height	95 mm

Base H x Ø	95 x 55 mm
Base diameter	55 mm
Pendulum Length max.	2180 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-20 to 50 °C
IP Protection Class	IP 20

Life Time L70 / B50	20000 h
Switching Cycles	15000
Power Consumption	7 kWh/1000h
EEI	G

