

# Triac Dimming LED Driver

LT-75-xxT



## Features



- Independent ultra-slim design
- Dimmable constant voltage driver
- Flicker-free
- Dimming with leading edge or trailing edge dimmer
- Smooth dimming compatible with most dimmer
- Dimming range 1...100%
- Push wire connections
- Support loop-through wiring
- Differential mode 2kV and common mode 4kV surge immunity
- Protections: opencircuit, shortcircuit, overload, overtemperature
- DC input compatible (176-280VDC)
- SELV equivalent
- Suitable for protection class II luminaires
- Protection class II



## Selection Guide

Model No.	Nominal Voltage (V)	Nominal Current (A)	Power Factor (λ)	THD Full load (%)	Max. Output (W)	Output Current (A)	Output Voltage (V)	No Load Voltage (V)	Efficiency Full Load (%)
LT-75-24T	220-240	0.50	0.95	10	75	1.04-3.13	24	25	92
LT-75-48T	220-240	0.50	0.95	10	75	0.52-1.56	48	50	90

## Input Parameters

Parameter	Condition	Min.	Typ.	Max.																				
Input Voltage Range	AC Input	198VAC	--	264VAC																				
	DC Input	176VDC	--	280VDC																				
Rated Input Frequency	AC Input	--	50/60Hz	--																				
No-load Power Consumption		--	--	2W																				
Inrush Current	Cold Start@230V	65A/300us																						
Max.units Per Circuit Breaker	<table border="1"> <thead> <tr> <th>Circuit Breaker</th> <th colspan="4">Circuit Breaker Current</th> </tr> <tr> <th>Typ.</th> <th>10A</th> <th>13A</th> <th>16A</th> <th>20A</th> </tr> </thead> <tbody> <tr> <td>B</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> </tr> <tr> <td>C</td> <td>5</td> <td>7</td> <td>9</td> <td>11</td> </tr> </tbody> </table>				Circuit Breaker	Circuit Breaker Current				Typ.	10A	13A	16A	20A	B	2	3	4	5	C	5	7	9	11
Circuit Breaker	Circuit Breaker Current																							
Typ.	10A	13A	16A	20A																				
B	2	3	4	5																				
C	5	7	9	11																				

## Output Parameters

Parameter	Condition	Min.	Typ.	Max.
Output Accuracy	Full Load@230V	--	±5%	--
Ripple & Noise	Low Frequency < 120Hz, Full Load@230VAC	--	--	3%
Pst LM		--	--	1

# Triac Dimming LED Driver



LT-75-xxT

SVM		--	--	0.4
Galvanic Isolation	SELV			
Short-Circuit Protection (SCP)	Auto-Recovery If Fault Is Removed			
Over-Voltage Protection (OVP)	N/A			
Over-Current Protection (OCP)	Auto-Recovery If Fault Is Removed			

## General Parameters

Parameter	Condition	Value
Ambient Temperature Range $t_a$		-20...+45 °C
Maximum Case Temperature $t_c$	Measured on $t_c$ point indicated of the product label	90 °C
Max.Case Temp.In Fault Condition		110 °C
Storage Temperature Range		-20...+70 °C
Relative Humidity	Non Condensing	5...85%
Withstand Voltage	I/P-O/P	3.75kVAC, I leakage < 5mA, 60s
Surge Transient Protection	L-N, L/N-PE	2kV, 4kV
Environmental Rating		Indoor
IP Rating		IP20
Mains Switching Cycles		> 100,000
Expected Lifetime	$t_{cmax}=90^{\circ}\text{C}$ , 0.2%/1000h failure rate	50,000h

## Dimming Parameters

Dimmable	Yes
Dimming control	Leading/Trailing edge
Dimming range	1-100%

## Physical Parameters


Housing Material	PC
Type of connection	Push terminal
Dimensions (LxWxH)	400x32x21.6mm
Mounting hole spacing	393mm
Weight	290 ± 20g (LT-75-24T); 330 ± 20g (LT-75-48T)

## Standards

Safety Standards	EN 61347-1, EN 61347-2-13
Performance	EN 62384
EMC Standards	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547

\*ALL parameters NOT specially mentioned are measured at 230VAC input, rated current and 25 °C of ambient temperature.

## Product Characteristic Curve

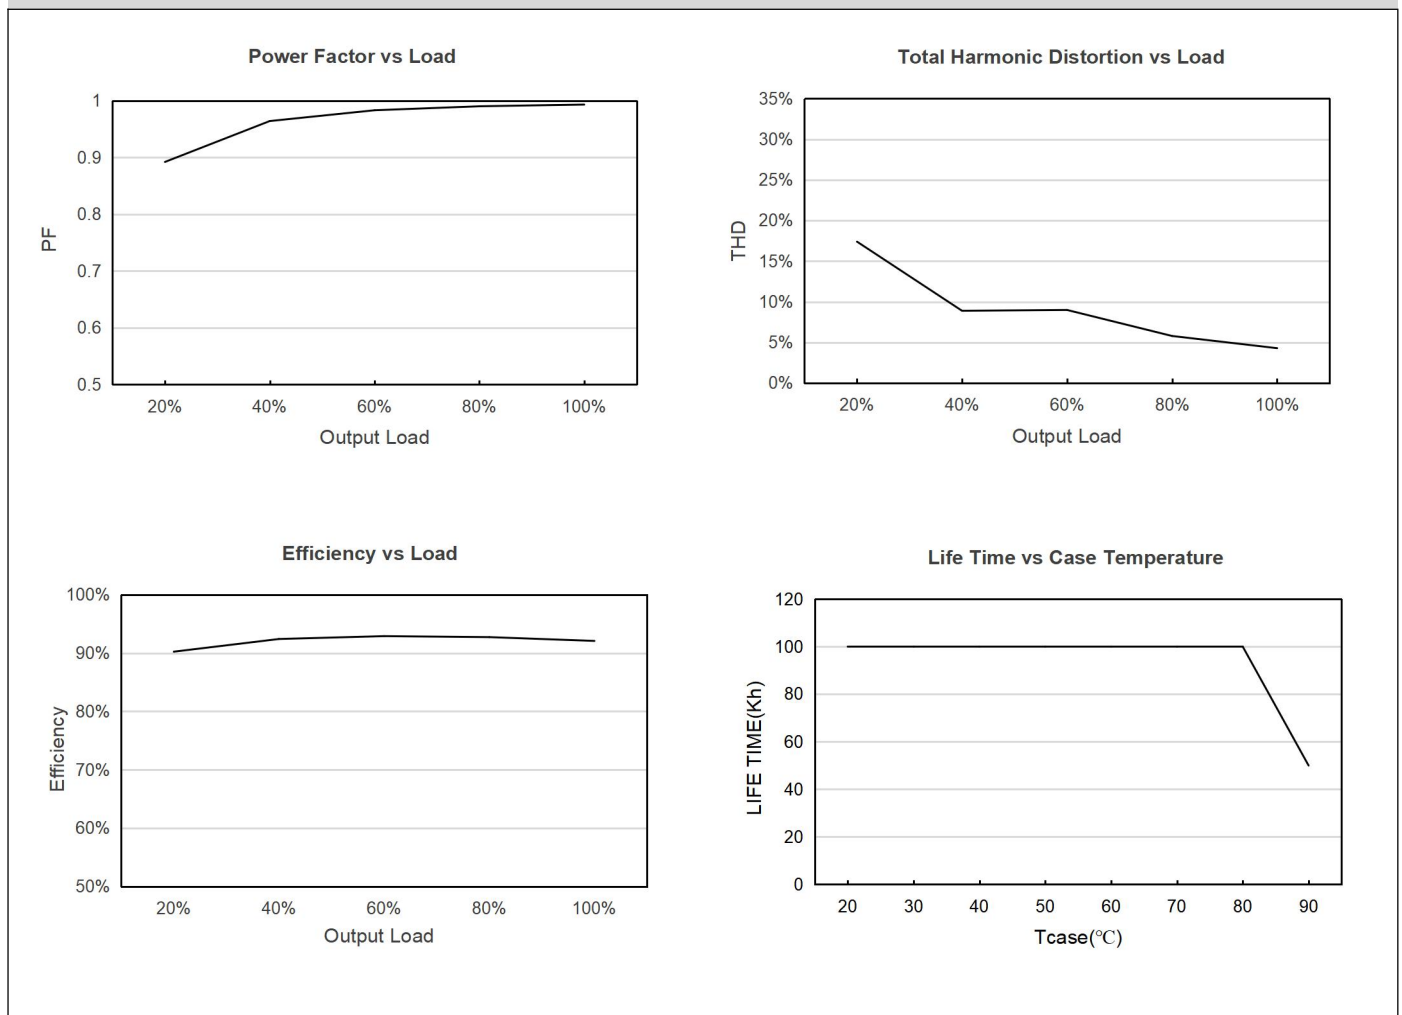


# Triac Dimming LED Driver

LT-75-xxT




## Appearance of Size

### Dimension Drawing(mm)

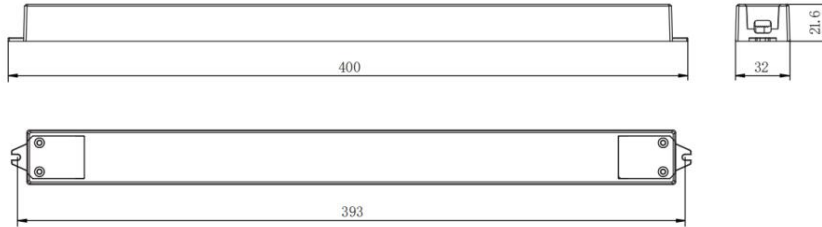

### Wiring Diagram

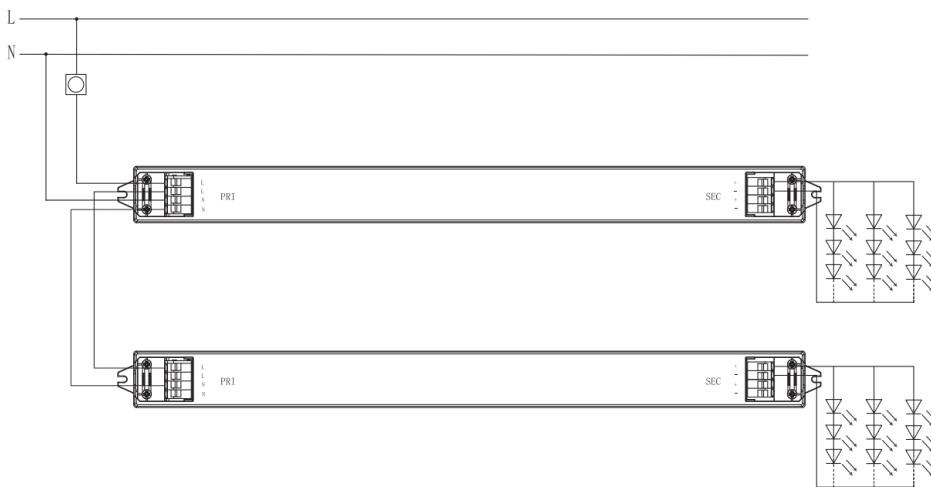

#### PRI

Cable cross-section: 0.75-1.5mm<sup>2</sup>

Stripping: 11mm

#### SEC

Cable cross-section: 0.5-1.5mm<sup>2</sup>

Stripping: 11mm

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.