

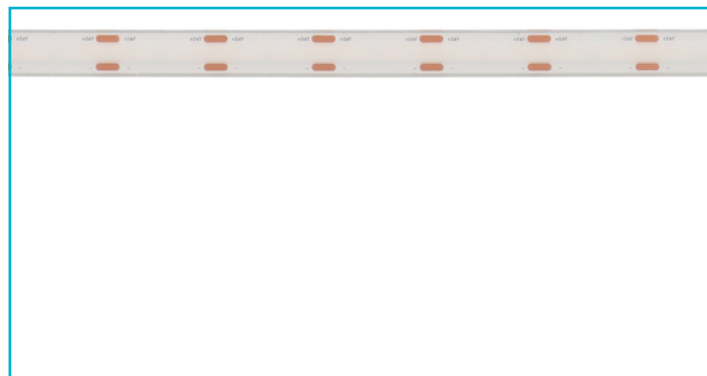


Strip light**Professional, COB, 24 V-15 W, 2700 K, IP67, 5 m**

Housing Color	White	LED Distance	3.47 mm
Mounting Location	Inside, Outside	Bending Radius min.	70 mm
Protection Class	Protection class III/safety extra-low voltage	Total Length to be Operated max.	5 m
Operating Mode	Constant voltage	Length	5000 mm
Rated Input 1m	15 W	Width	12 mm
Rated Power Consumption Standby	0.5 W	Height	4.5 mm
Rated Input Voltage	24 V/DC	Width Hose	12 mm
Power Supply Unit incl.	No	Height Hose	2.2 mm
Connection Cable Primary	Yes	Length end cap	10 mm
Primary Connection	With free strand / conductor ends	Width end cap	14 mm
Primary Cable Length	0.5 m	Height end cap	3.2 mm
Connection Cable Secondary	Yes	Product weight	370 g
Secondary Connection	Open cables	Working Temperature	-20 to 50 °C
Secondary Cable Length	0.5 m	Storage Temperature	-30 to 80 °C
Dimmable	Yes	IP Protection Class	IP 67
Control	Dimmable via optional controller	Type of IP Protection	Silicone hose
Number of Channels	1	Life Time L70 / B50	54000 h
Light Source	LED, Light source not changeable	Life Time L80 / B10	54000 h
Lightcolor	Warm white (WW)		
Color Temperature	2700 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	90		
Rated Angle of Reflection	180 Degree		
Luminous Flux 1m	2060 lm		
Luminous Efficiency 1m	137 lm/W		
LED/Meter	288		
Segment Length	27.77 mm		
Segment LED Quantity	8		
Switching Cycles	27000		
Power Consumption	15 kWh/1000h		
EEI	E		



Art.-Nr. 840470

Strip light
Professional, COB, 24 V-15 W, 2700 K, IP67, 5 m

