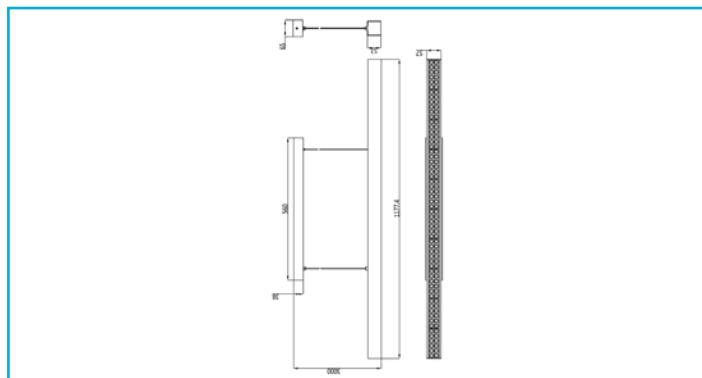


Pendant lamp**Set, D Profession Up and Down, 60 W, DALI, 4,000 K, white**

Due to their flexible control options, you can use the D PROFESSION pendant lamps both in private and in commercial applications. The Up and Down version emits its light in two directions. Whilst the LEDs directed upwards generate pleasant, indirect room lighting, the LEDs directed downwards ensure defined, powerful and UGR-compliant office and work lighting for desks and more.

Special features

- High light output
- Low glare value
- Max. suspended mounting 3,000 mm
- Dimmable

Housing Material	Aluminium
Housing Color	White
Material of Lens	Plastic
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	60 W
Rated Power Consumption Network Standby	0.5 W
Rated Input Voltage Frequency	200-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	DALI 1 / DT6
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	7180 lm
Luminous Efficiency	119.7 lm/W
Rated Angle of Reflection	110 Degree
Rated Angle of Reflection 2	24 Degree
UGR	19
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	1177.4 mm
Width	53 mm
Height	53 mm
Base length	560 mm
Base L x W x H	560 x 65 x 38 mm
Base width	65 mm
Base height	38 mm
Pendulum Length max.	3000 mm
Working Temperature	-20 to 40 °C
Storage Temperature	-30 to 60 °C
IP Protection Class	IP 20
Life Time L70 / B50	50000 h
Switching Cycles	25000
Power Consumption	60 kWh/1000h
EEL	E

