


**Special features**

- Ideal for homogeneous basic lighting
- Slim design
- Can be rotated and swivelled
- High luminous flux

|                                         |                                         |
|-----------------------------------------|-----------------------------------------|
| <b>Housing Material</b>                 | Aluminium                               |
| <b>Housing Color</b>                    | White                                   |
| <b>Housing Surface</b>                  | Matt                                    |
| <b>Material of Lens</b>                 | Plastic                                 |
| <b>Surface Structure of Lens</b>        | Opal                                    |
| <b>Protection Class</b>                 | Protection class I/protective grounding |
| <b>Rated Input</b>                      | 21 W                                    |
| <b>Rated Input Voltage Frequency</b>    | 110-240 V/AC 50 / 60 Hz                 |
| <b>Power Supply Unit incl.</b>          | Yes                                     |
| <b>Connection Type</b>                  | Adapter                                 |
| <b>Dimmable</b>                         | No                                      |
| <b>Motion Detector</b>                  | No                                      |
| <b>Light Source</b>                     | LED, Light source not changeable        |
| <b>Lightcolor</b>                       | Neutral white                           |
| <b>Color Temperature</b>                | 4000 K                                  |
| <b>Colour Consistency</b>               | 6 SDCM                                  |
| <b>Colour Rendering Index (Ra)</b>      | 80                                      |
| <b>Rated Luminous Flux</b>              | 1500 lm                                 |
| <b>Luminous Efficiency</b>              | 71.4 lm/W                               |
| <b>Rated Angle of Reflection</b>        | 115 Degree                              |
| <b>Light Distribution</b>               | Symmetric                               |
| <b>Distribution Characteristic 120°</b> | DLS                                     |
| <b>Swivel Angle</b>                     | 340 Degree                              |
| <b>Light Exit Surfaces</b>              | 1                                       |
| <b>Light characteristics</b>            | Direct                                  |
| <b>Light direction</b>                  | Below                                   |
| <b>Length</b>                           | 300 mm                                  |
| <b>Width</b>                            | 100 mm                                  |
| <b>Height</b>                           | 22 mm                                   |
| <b>Product weight</b>                   | 643 g                                   |

|                            |              |
|----------------------------|--------------|
| <b>Working Temperature</b> | -5 to 40 °C  |
| <b>Storage Temperature</b> | -10 to 40 °C |
| <b>IP Protection Class</b> | IP 20        |
| <b>Life Time L70 / B50</b> | 30000 h      |
| <b>Switching Cycles</b>    | 15000        |
| <b>Power Consumption</b>   | 21 kWh/1000h |
| <b>EEI</b>                 | G            |

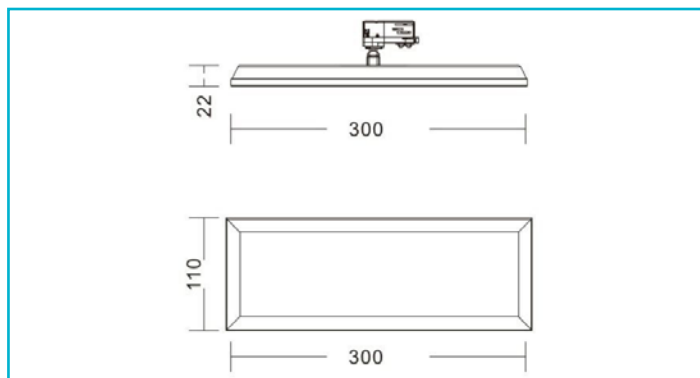