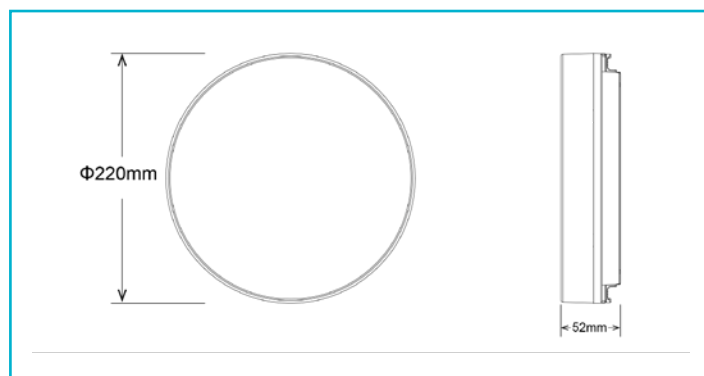


**Surface-mounted ceiling and wall lights****Altas 2 Round, Motion, 15 W, 2700/3000/4000 K, White****Special features**

- Light colour adjustable in 3 stages
- Power adjustable in 2 levels
- Adjustable motion detector with corridor function
- through-wiring possible
- Easy installation thanks to click system
- Optional surface-mounted cable entry
- BEG eligible


|                                |                                         |
|--------------------------------|-----------------------------------------|
| <b>Housing Material</b>        | Polycarbonate                           |
| <b>Housing Color</b>           | White                                   |
| <b>Through Wiring possible</b> | Yes                                     |
| <b>Mounting Type</b>           | Top mounting                            |
| <b>Mounting Location</b>       | Inside                                  |
| <b>Mounting Area</b>           | Ceiling installation, Wall installation |
| <b>Functions</b>               | Corridor function with motion detector  |

|                                        |                                               |
|----------------------------------------|-----------------------------------------------|
| <b>Protection Class</b>                | Protection class II/<br>protective insulation |
| <b>Power Selectable</b>                | 10 W, 15 W                                    |
| <b>Rated Power Consumption Standby</b> | 0.5 W                                         |
| <b>Rated Input Voltage Frequency</b>   | 100-240 V/AC 50 / 60 Hz                       |
| <b>Number of Cable Entries</b>         | 2                                             |
| <b>Dimmable</b>                        | No                                            |
| <b>Motion Detector</b>                 | Yes                                           |
| <b>Kind of Motion Detector</b>         | High frequency                                |
| <b>Detection Distance</b>              | 3-6 m                                         |
| <b>Angle of Detection</b>              | 130 Degree                                    |
| <b>Adjustable brightness threshold</b> | Yes                                           |
| <b>Brightness threshold</b>            | 30-100 lx                                     |
| <b>Adjustable follow-up time</b>       | Yes                                           |
| <b>Follow-up time</b>                  | 5-900 s                                       |

|                                        |                                 |
|----------------------------------------|---------------------------------|
| <b>Light Source</b>                    | LED, Light source changeable TC |
| <b>Color Temperature</b>               | 2700/3000/4000 K                |
| <b>Colour Consistency</b>              | 3 SDCM                          |
| <b>Colour consistency light source</b> | 3 SDCM                          |
| <b>CRI (Ra)</b>                        | 85                              |
| <b>Rated Luminous Flux</b>             | 1725/1800/1800 lm               |
| <b>Rated Angle of Reflection</b>       | 120 Degree                      |
| <b>UGR</b>                             | 22                              |

|                              |               |
|------------------------------|---------------|
| <b>Light Exit Surfaces</b>   | 1 PCS         |
| <b>Light characteristics</b> | Direct        |
| <b>Light direction</b>       | Below         |
| <b>Height</b>                | 52 mm         |
| <b>Diameter</b>              | 220 mm        |
| <b>Base height</b>           | 20.5 mm       |
| <b>Base H x Ø</b>            | 20.5 x 180 mm |
| <b>Base diameter</b>         | 180 mm        |

|                                 |               |
|---------------------------------|---------------|
| <b>Working Temperature</b>      | -10 to 50 °C  |
| <b>Storage Temperature</b>      | -20 to 60 °C  |
| <b>Surface Temperature max.</b> | 50 °C         |
| <b>IP Protection Class</b>      | IP 54         |
| <b>IK Protection Class</b>      | IK10          |
| <b>Inrush Current max.</b>      | 18 A / 440 µs |
| <b>Max. units per MCB B10</b>   | 121           |
| <b>Max. units per MCB B16</b>   | 121           |
| <b>Max. units per MCB C10</b>   | 192           |
| <b>Max. units per MCB C16</b>   | 192           |

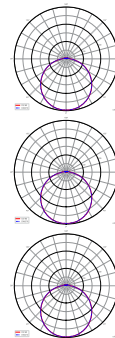

Art.-Nr. 348279



Surface-mounted ceiling and wall lights  
Altas 2 Round, Motion, 15 W, 2700/3000/4000 K, White

---

|                                     |                                                                    |
|-------------------------------------|--------------------------------------------------------------------|
| Life Time L70 / B50                 | 50000 h                                                            |
| Life Time L80 / B10                 | 50000 h                                                            |
| Life Time L80 / B50                 | 50000 h                                                            |
| Switching Cycles                    | 100000                                                             |
| Power Consumption                   | 15 kWh/1000h                                                       |
| Energy Efficiency Class Lightsource | This product contains a light source of energy efficiency class C. |