


Single-phase pendant lamp
Lucea 6, 6 W, DIM, 2700 K, black

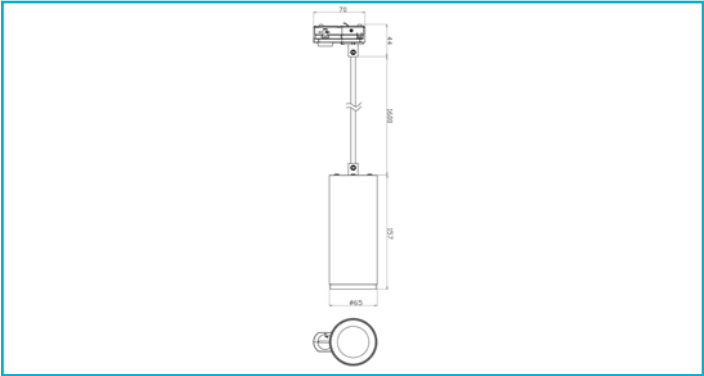

Matching LUCEA series pendant lamps for the three-phase 230 V current track system are available in 10, 15 and 20 W versions and offer up to 2,000 lumens light output. The maximum suspended mounting is 1,800 mm. Using optional lenses, the light emission angle of the individual models can be narrowed or expanded. Lucea lights feature an aluminium housing.

- Special features**
- Particularly soft textile cable
 - incl. black reflector ring

Housing Material	Aluminium	Diameter	65 mm
Housing Color	Black	Product weight	546 g
Material of Lens	PMMA	Working Temperature	-20 to 40 °C
Halogen free	No	Storage Temperature	-20 to 65 °C
Mounting Type	Top mounting	IP Protection Class	IP 20
Mounting Location	Inside	IK Protection Class	IK03
Mounting Area	Ceiling installation	Max. units per MCB B10	196 PCS
Protection Class	Protection class I/ protective grounding	Max. units per MCB B16	313 PCS
Rated Input	6 W	Max. units per MCB C10	196 PCS
Rated Power Consumption Standby	1 W	Max. units per MCB C16	313 PCS
Rated Input Voltage Frequency	200-240 V/AC 50 / 60 Hz	Life Time L70 / B50	50000 h
Power Supply Unit incl.	Yes	Switching Cycles	100000
Dimmable	Yes	Power Consumption	6 kWh/1000h
Control	Leading-edge dimmer, Trailing-edge dimmer	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	2700 K		
Colour Consistency	5 SDCM		
Colour consistency light source	5 SDCM		
CRI (Ra)	90		
Rated Luminous Flux	800 lm		
Luminous Efficiency	133.3 lm/W		
Rated Angle of Reflection	36 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	157 mm		

