


Surface-mounted ceiling light
Set, Zaniah 420 mm, 24 W, DIM, 3,000 K, cover grey

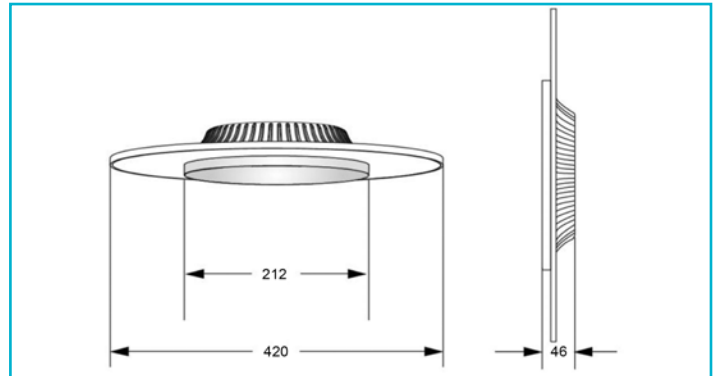

Whilst flat surfaces and covers are the go-to for most surface-mounted ceiling lights, the ZANIAH places special emphasis on its 360° lamp [either a 12 W, 18 W or 24 W variant]. Replaceable covers allow the visual appearance of ZANIAH to be changed even after installation. The covers are available in eight colour variants, allowing plenty of scope for customisation.

Special features

- Can be customised using coloured covers
- 360° light emission angle
- Can be used as a wall or ceiling light

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Plastic
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class II/ protective insulation
Rated Input	24 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	2565 lm
Luminous Efficiency	106.9 lm/W
Rated Angle of Reflection	120 Degree
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Below, Rear

Height	46 mm
Diameter	420 mm

Working Temperature	-20 to 45 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 20
IK Protection Class	IK05
Max. units per MCB B10	50 PCS
Max. units per MCB B16	80 PCS
Max. units per MCB C10	50 PCS
Max. units per MCB C16	80 PCS
Life Time L70 / B50	50000 h
Switching Cycles	25000
Power Consumption	24 kWh/1000h
EEI	F

