


Art. no. 348059

Surface-mounted ceiling light Luna, 30 W, 3,000 K, white

DEKOLIGHT

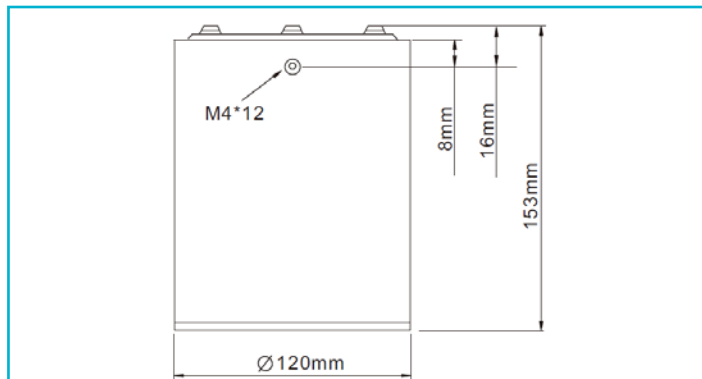

Housing Material Aluminium
Housing Color White
Housing Surface Matt
Material of Lens Plastic
Surface Structure of Lens Transparent

IP Protection Class IP 20
Life Time L70 / B50 50000 h
Switching Cycles 100000
Power Consumption 31 kWh/1000h
EEL G

Protection Class Protection class I/protective grounding
Rated Input 30.3 W
Rated Input Voltage Frequency 220-240 V/AC 50 / 60 Hz
Power Supply Unit incl. Yes
Connection Type Clamp
Dimmable No
Motion Detector No

Light Source LED, Light source not changeable
Color Temperature 3000 K
Colour Consistency 6 SDCM
Colour Rendering Index (Ra) 90
Rated Luminous Flux 1970 lm
Rated Angle of Reflection 40 Degree
Light Distribution Symmetric
Distribution Characteristic 120° DLS

Light Exit Surfaces 1
Light characteristics Direct
Light direction Below

Height 153 mm
Diameter 120 mm
Base height 20 mm
Base diameter 115 mm

Working Temperature -5 to 40 °C
Storage Temperature -10 to 40 °C

