


Surface-mounted wall light
Cubodo 2 double, 16 W, 3,000 K, white

IP54

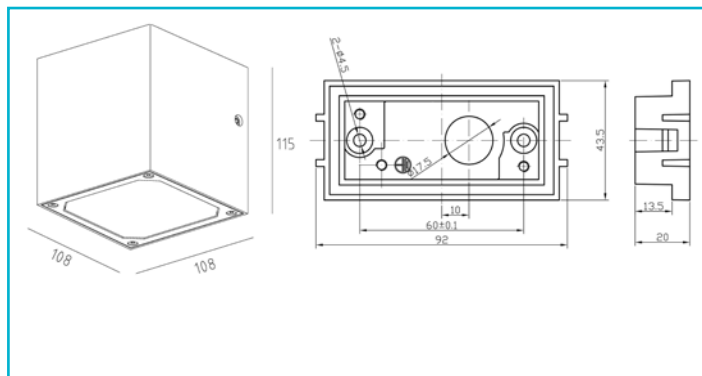

Housing Material	Aluminium
Housing Color	White
Material of Lens	Glass
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Rated Input	16 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	1300 lm
Luminous Efficiency	80.3 lm/W
Rated Angle of Reflection	19 Degree
Rated Angle of Reflection 2	19 Degree
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	108 mm
Width	108 mm
Height	115 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 54
IK Protection Class	IK04
Max. units per MCB B10	22 PCS
Max. units per MCB B16	36 PCS
Max. units per MCB C10	37 PCS
Max. units per MCB C16	60 PCS
Life Time L70 / B50	30000 h
Switching Cycles	100000
Power Consumption	16 kWh/1000h
EEI	G

