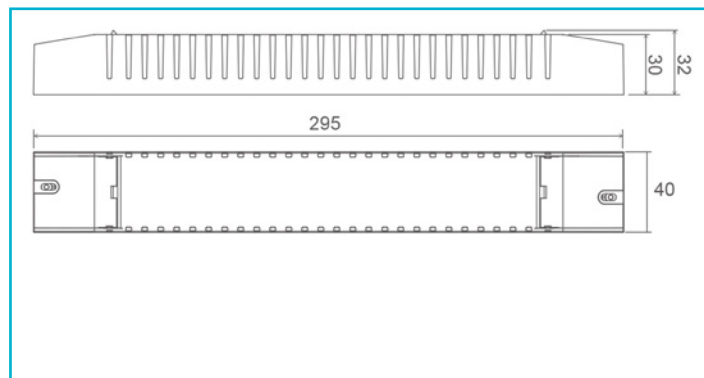


**Power supply unit (CV, DC) dimmable
BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20**

Special features

- Can be dimmed using DALI2/DALI1
- Can be dimmed using 0-10 V/1-10 V
- Can be dimmed using touch dimmer via 230 V push-button (iPush)
- New Intelli-Push function [shortcut synchronises all connected power supply units when needed]
- Power supply unit and PWM dimmer in one device
- Secured against short circuits and overloads
- Overheating protection

Housing Material	Plastic
Housing Color	White
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection

Height	32 mm
Product weight	412 g

Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	150 W
Output Voltage	24 V/DC
Output Current	0-6250 mA
Dimmable	Yes
Min./max. dimming range	0.1-100 %
Control	DALI 2 / DT6, 0-10 V, 1-10 V, Intelli Push-Dim
Number of Channels	1
Power Factor	0.98

Max. units per MCB B10	5 PCS
Max. units per MCB B16	9 PCS
Max. units per MCB C10	9 PCS
Max. units per MCB C16	15 PCS
Inrush Current max.	38 A / 430 µs
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-40 to 85 °C
IP Protection Class	IP 20

Switching Cycles	25000
Life Time	50000 h

Length	295 mm
Width	40 mm

