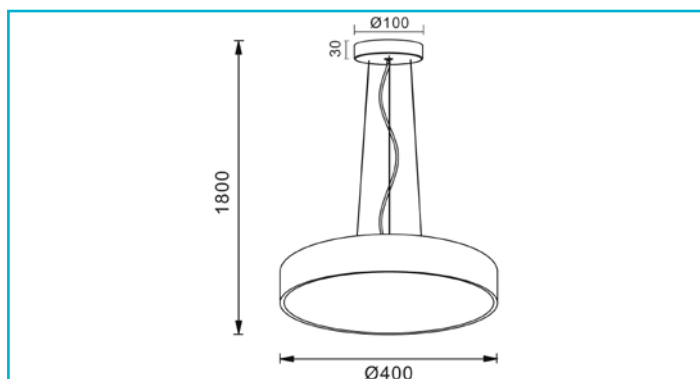


Pendant lamp**Menkar 400 mm, 45.0 W, 3,000/4,000 K, dark brown**

The pendant lights in the MENKAR series impress with clever lighting functions and high-quality aluminium accents. The separate rear light (approx. 15 - 20 % indirect light component) enables permanent indirect lighting. The light colour can be adjusted in 2 stages [3000/4000K] via a CCT switch.

Special features

- Indirect and direct lighting
- High light intensity
- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]
- Optional diffuser lens for UGR<19

Housing Material	Aluminium
Housing Color	Dark brown
Surface structure	Brushed
Material of Lens	Acryl
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I / protective grounding
Rated Input	45 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No
Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	3300/3500 lm
Luminous Efficiency	77.8 lm/W
UGR	25
Light Distribution	Symmetric
Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below
Height	90 mm
Diameter	400 mm

Base height	30 mm
Base H x Ø	30 x 100 mm
Base diameter	100 mm
Pendulum Length max.	1800 mm
Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04
Max. units per MCB B10	17 PCS
Max. units per MCB B16	28 PCS
Max. units per MCB C10	37 PCS
Max. units per MCB C16	59 PCS

Life Time L70 / B50	30000 h
Switching Cycles	20000
Power Consumption	45 kWh/1000h
Energy Efficiency Class Lightsource	This product contains light sources of energy efficiency classes E and F.

