


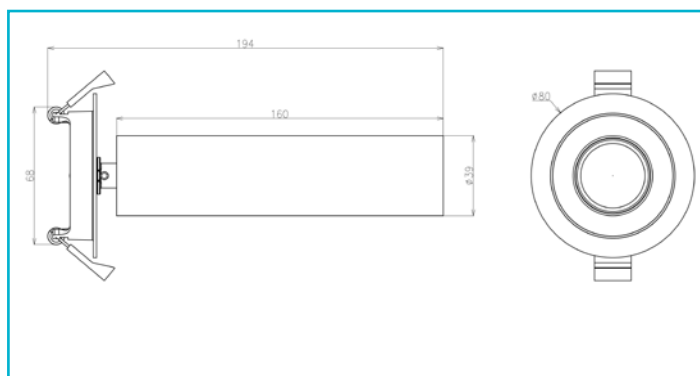

Matching recessed spotlights are available for our SLIM luminaire series. The die-cast aluminium luminaire body is always the same size [300 x 39 mm]. The SLIM recessed spotlights have the standard installation dimension of 68 mm. This makes the single-flame recessed spotlights particularly suitable for sales areas, reception areas or even hotels and restaurants.

Special features

- Glare-free, due to low UGR value (<19)
- Slim design with only 39 mm diameter
- Incl. silver-coloured reflector ring
- Installation diameter 68 mm

Housing Material	Aluminium	Light direction	Below
Housing Color	Black	Height	194 mm
Through Wiring possible	Yes	Diameter	80 mm
Halogen free	No	Installation Depth	25 mm
Mounting Type	Installation mounting	Cut Out Diameter	68 mm
Mounting Location	Inside	Product weight	273 g
Mounting Area	Ceiling installation		
Protection Class	Protection class II/ protective insulation	Working Temperature	-20 to 45 °C
Rated Input	5 W	Storage Temperature	-20 to 65 °C
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	IP Protection Class	IP 20
Power Supply Unit incl.	Yes	Max. units per MCB B10	230 PCS
Dimmable	Yes	Max. units per MCB B16	368 PCS
Control	Leading-edge dimmer, Trailing-edge dimmer	Max. units per MCB C10	230 PCS
Motion Detector	No	Max. units per MCB C16	368 PCS
Light Source	LED, Light source changeable TC	Life Time L70 / B50	50000 h
Color Temperature	2700 K	Switching Cycles	100000
Colour Consistency	3 SDCM	Power Consumption	5 kWh/1000h
Colour consistency light source	3 SDCM	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
CRI (Ra)	90		
Rated Luminous Flux	500 lm		
Luminous Efficiency	100 lm/W		
Rated Angle of Reflection	36 Degree		
UGR	19		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Swivel Angle	60 Degree		
Rotation Angle	300 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		

