




Housing Material	Aluminium	Diameter	200 mm
Housing Color	Dark grey	Base diameter	150 mm
Surface structure	Varnished	Working Temperature	-20 to 40 °C
Material of Lens	Plastic	Storage Temperature	-10 to 60 °C
Colour of Lens	White	IP Protection Class	IP 44
Surface Structure of Lens	Opal	Life Time L70 / B50	20000 h
Mounting Type	Top mounting	Switching Cycles	15000
Mounting Location	Outside	Power Consumption	7 kWh/1000h
Mounting Area	Wall installation	EEI	G
Ultraviolet resistance	Yes		
Protection Class	Protection class I/ protective grounding		
Rated Input	6.8 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	80		
Rated Luminous Flux	300 lm		
Luminous Efficiency	44.1 lm/W		
Rated Angle of Reflection	120 Degree		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	2		
Light characteristics	Direct		
Light direction	Front, Side		
Height	72 mm		

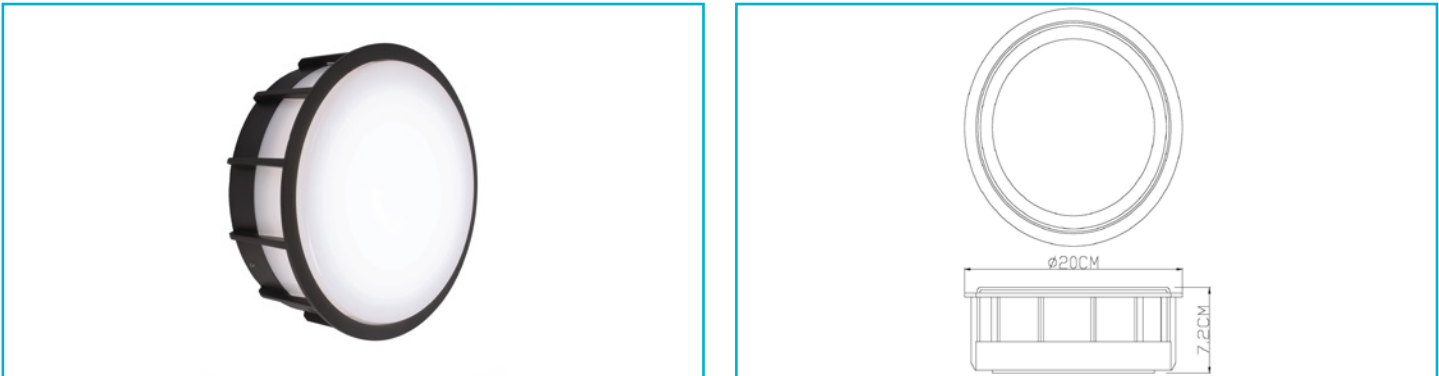