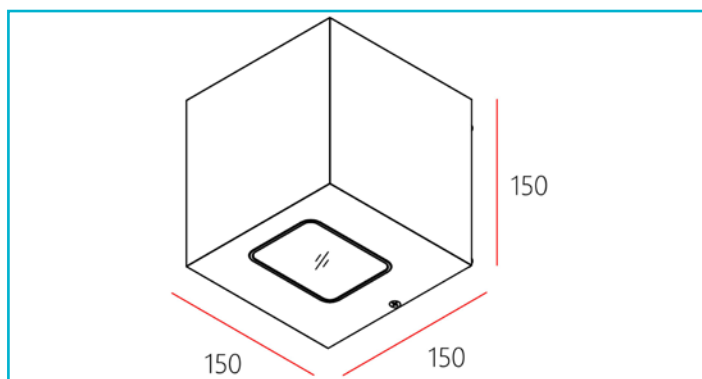


Surface-mounted wall light
Jabbah Up and Down, 25 W, 3,000 K, grey


The square JABBAH uses integrated COB LEDs in warm white, emitting its light asymmetrically at an angle of 75° onto walls in a cone of illumination - in a simple variant providing 915 lumens, as an UP AND DOWN version providing a total of 1,850 lumens. In addition, the two-sided JABBAH can be dimmed to 60 % luminous flux using a dip switch, if a more subtle light is desired.

Special features

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- Incl. wall spacer for surface-mounted cable entry
- Power adjustable in 2 stages (model-dependent)

Housing Material	Aluminium
Housing Color	Dark grey
Through Wiring possible	Yes
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Power Selectable	13 W, 25 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Number of Cable Entries	2 PCS
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	1850 lm
Luminous Efficiency	74 lm/W
Rated Angle of Reflection	75 Degree
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	150 mm
Width	150 mm
Height	150 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-20 to 60 °C
IP Protection Class	IP 65
Max. units per MCB B10	48 PCS
Max. units per MCB B16	77 PCS
Max. units per MCB C10	77 PCS
Max. units per MCB C16	123 PCS
Life Time L70 / B50	50000 h
Switching Cycles	15000
Power Consumption EEI	25 kWh/1000h G

