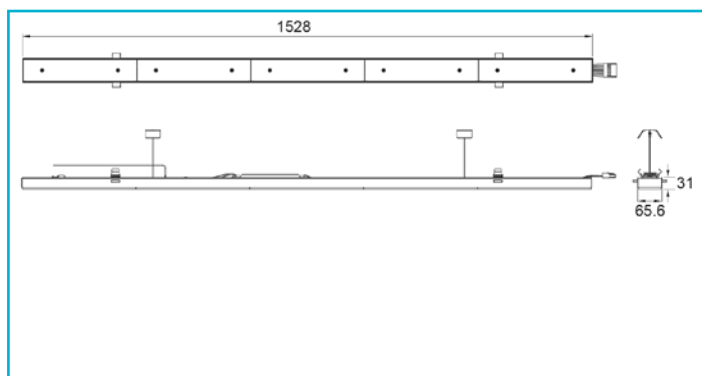


**Special features**

- Renovation solution for T5/T8 light strip systems
- Continued use of existing mounting rails possible
- Easy, quick and reliable installation
- Compatible with common manufacturers
- Eligible for BEG German federal funding for energy-efficient buildings
- Can run on emergency power
- Can be individually adapted to the lighting circumstances

Housing Material	Aluminium
Housing Color	White
Material of Lens	PMMA
Product certification	ENEC
Through Wiring possible	Yes
Halogen free	Yes
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Emergency power capable, Phase switch
Scope of Delivery	2x safety rope (pre-mounted)


Protection Class	Protection class I / protective grounding
Power Selectable	70 W, 64 W, 55 W, 49 W, 39 W, 34 W, 26 W, 20 W
Rated Input Voltage Frequency	198-264 V/AC 50 / 60 Hz
Dimmable	No
Voltage range DC	168-275 V/DC
Voltage range emergency lighting	186-250 V/DC
EOFI	100 %

Light Source	LED, Light source changeable TC
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	80
Rated Luminous Flux	12400 lm
Luminous Efficiency	165 lm/W
Rated Angle of Reflection	30 Degree
UGR	22

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	1528 mm
Width	65.6 mm
Height	31 mm
Product weight	1922 g

Working Temperature	-25 to 50 °C
Storage Temperature	-25 to 85 °C
Surface Temperature max.	65 °C
IP Protection Class	IP 40
IK Protection Class	IK04
Inrush Current max.	19 A / 280 µs
Max. units per MCB B10	15
Max. units per MCB B16	24
Max. units per MCB C10	24
Max. units per MCB C16	40

Life Time L70 / B50	130000 h
----------------------------	----------



Art.-Nr. 707226



Trunking system

Sanotrunk Universal 30 degree, 70 W, On/Off, 4000 K, White

Life Time L80 / B10	72000 h
Life Time L80 / B50	85000 h
Switching Cycles	50000
Power Consumption	70 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class C.