


Art. no. 348137

Surface-mounted ceiling light Mirach 580 mm, 54 W,
DIM, 3,000 K, coffee

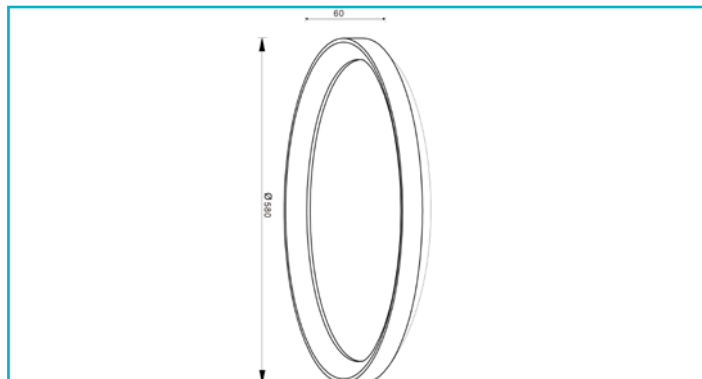

Special features

- Timeless design
- Dimmable with leading phase angle and trailing phase angle
- Low assembly height
- High-quality workmanship
- High luminous intensity

Housing Material	Aluminium	Life Time L70 / B50	30000 h
Housing Color	Coffee	Switching Cycles	25000
Housing Surface	Brushed	Power Consumption	54 kWh/1000h
Material of Lens	Acryl	EEI	E
Colour of Lens	White		
Surface Structure of Lens	Opal		
Protection Class	Protection class I/protective grounding		
Rated Input	54 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Dimmable	Yes		
Control	Leading-edge dimmer, Trailing-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	4365 lm		
Rated Angle of Reflection	130 Degree		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	60 mm		
Diameter	580 mm		
Working Temperature	-10 to 45 °C		
Storage Temperature	-10 to 45 °C		
IP Protection Class	IP 20		