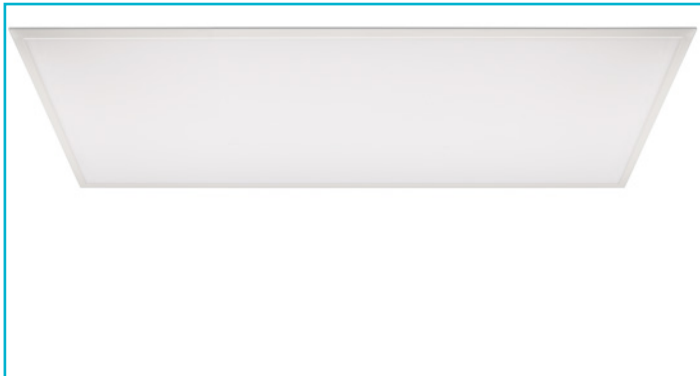


LED panel**Standard Flex 600x1200, 58 W, 3000/4000/6000 K, white****Special features**

- Light colour adjustable in three stages
- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for pendant mounting
- Suitable for reception rooms and hallways
- Can be combined with a power supply unit as desired [excl.]

Housing Material	Aluminium
Housing Color	White
Material of Lens	PMMA
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant current
Power Selectable	58 W, 55 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage	33-38 V/DC
Rated Current	1500 mA
Power Supply Unit incl.	No
Dimmable	Yes
Control	Dimmable via optional power supply unit
Motion Detector	No

Length	1195 mm
Width	595 mm
Height	10 mm
Product weight	4820 g

Working Temperature	-10 to 40 °C
Storage Temperature	-10 to 50 °C
IP Protection Class	IP 40
IK Protection Class	IK03

Life Time L70 / B50	75000 h
Life Time L80 / B10	50000 h
Life Time L80 / B50	60000 h
Switching Cycles	100000
Power Consumption	58 kWh/1000h
EEL	F

Light Source	LED, Light source not changeable
Color Temperature	3000/4000/6000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	5300/6000/5700 lm
Luminous Efficiency	110.7 lm/W
Rated Angle of Reflection	120 Degree
UGR	22
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

