



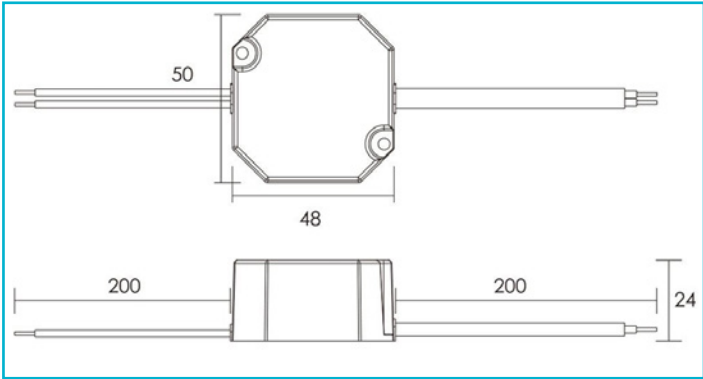

Power supply unit (CV, DC)
OCTO, CV, 24 V/12 W

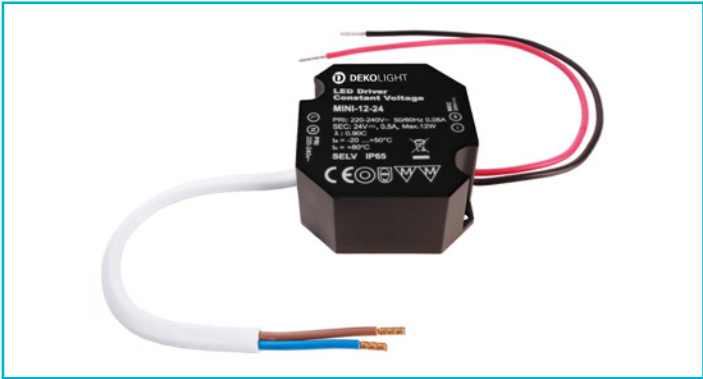

Special features

- Flicker-free
- Secured against short circuits and overloads

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	12 W
Output Voltage	24 V/DC
Output Current	0-500 mA
Power Factor	0.90
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables
Max. units per MCB B10	35
Max. units per MCB B16	56
Max. units per MCB C10	74
Max. units per MCB C16	118
Inrush Current max.	75 A / 300 μ s
Capacitive Load	622 μ F
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 65
Life Time	30000 h
Length	50 mm
Width	48 mm
Height	24 mm
Product weight	90 g

