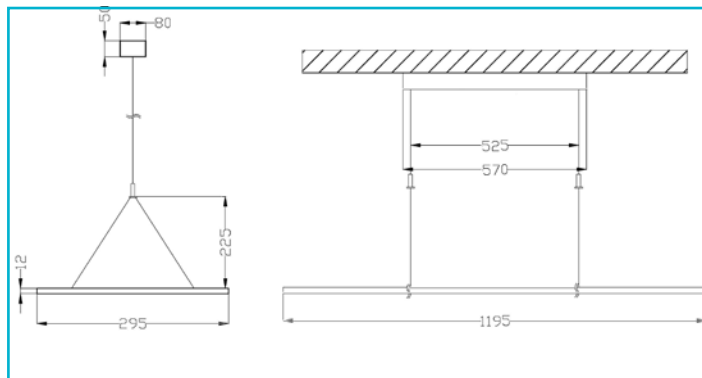


Pendant lamp**LED Panel transparent, angular, 50 W, DIM, 3,000/4,000 K, light grey**

The LED pendant lamp has transparent glass for direct and indirect light distribution that is almost see-through when switched off. When the light is switched on, the pane distributes the light almost entirely without glare.

This pendant lamp is fully office-compatible with a glare value [UGR] of under 19. Bright, efficient and with a sophisticated design, this light not only stands out in any type of office environment.

Special features

- Very low glare value
- Light colour adjustable in 2 stages
- Transparent luminous element
- Max. suspended mounting 1,800 mm


Housing Material	Aluminium
Housing Color	Light grey
Material of Lens	PMMA
Halogen free	Yes
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Emergency power capable

Protection Class	Protection class I/ protective grounding
Rated Input	53 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No
Voltage range DC	176-280 V/DC
Voltage range emergency lighting	178-280 V/DC
EOFI	99 %

Light Source	LED, Light source not changeable
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	5600/6100 lm
Luminous Efficiency	122 lm/W
Rated Angle of Reflection	360 Degree
UGR	19
Light Distribution	Symmetric
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	2
Light characteristics	Direct
Light direction	Top, Below
Length	295 mm
Width	1195 mm
Height	12 mm
Base length	570 mm
Base L x W x H	570 x 80 x 50 mm
Base width	80 mm
Base height	50 mm
Pendulum Length max.	1800 mm

Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 40 °C
IP Protection Class	IP 40
Inrush Current max.	5 A / 300 µs
Max. units per MCB B10	31 PCS
Max. units per MCB B16	51 PCS
Max. units per MCB C10	31 PCS

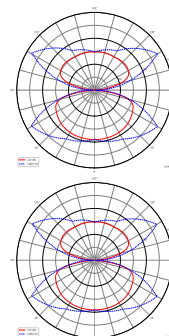

Art.-Nr. 342220



Pendant lamp
LED Panel transparent, angular, 50 W, DIM, 3,000/4,000 K, light grey

Max. units per MCB C16	51 PCS
Life Time L70 / B50	50000 h
Life Time L80 / B50	50000 h
Switching Cycles	25000
Power Consumption	53 kWh/1000h
EEI	E