


Surface-mounted wall light
Grumium Round, 10 W, 3,000 K, grey

IP54

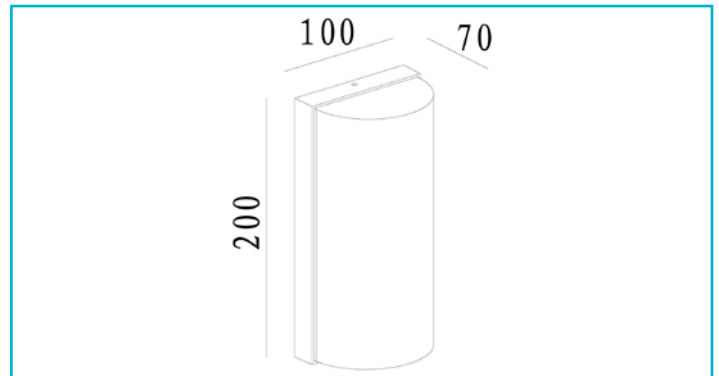

Modular, compact, impactful - The GRUMIUM wall-mounted light can be installed on patios, building walls or in entrances to living spaces and, thanks to its optional covers in different designs, provides a flexible universal solution for many areas of application. The permanently installed and energy-saving LEDs delivering max. 10 watts are encompassed by a diffuser made of milky plastic and produce a pleasant warm white light with a luminous flux of 730 lm. The Grumium outdoor light with die-cast aluminium housing comes in an angular and rounded design and has degree of protection IP54.

Housing Material	Aluminium	Height	200 mm
Housing Color	Dark grey	Base length	95 mm
Material of Lens	Plastic	Base L x W x H	95 x 15 x 195 mm
Colour of Lens	White	Base width	15 mm
Mounting Type	Top mounting	Base height	195 mm
Mounting Location	Outside	Working Temperature	-20 to 40 °C
Mounting Area	Wall installation	Storage Temperature	-10 to 60 °C
Ultraviolet resistance	Yes	IP Protection Class	IP 54
Protection Class	Protection class I/ protective grounding	Life Time L70 / B50	30000 h
Rated Input	11 W	Switching Cycles	15000
Rated Input Voltage Frequency	100-240 V/AC 50 / 60 Hz	Power Consumption	11 kWh/1000h
Power Supply Unit incl.	Yes	EEI	F
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	80		
Rated Luminous Flux	730 lm		
Luminous Efficiency	66.4 lm/W		
Rated Angle of Reflection	138 Degree		
Light Distribution	Symmetric		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	1		
Light characteristics	Direct, Indirect		
Light direction	Top, Below, Side, Front		
Length	100 mm		
Width	70 mm		

