


LED panel
Basic 300x1,200 mm, 30.5 W, 4,000 K, white

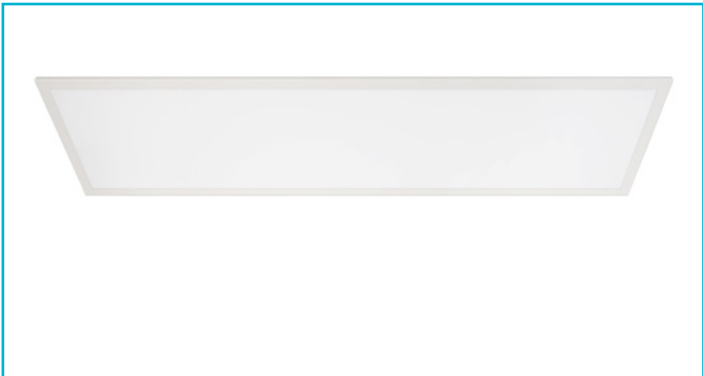

Special features

- BEG-eligible
- cost-effective, ready-to-connect solution
- for insertion into grid ceilings
- Mounting in surface-mounted and recessed frames possible
- Refurbishment solution for T5/T8 louver luminaires
- Incl. power supply unit CC, 900mAh, 33-38V, 36W

Housing Material	Aluminium
Housing Color	White
Material of Lens	Plastic
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class Lamp	Protection class II/ protective insulation
Protection Class Power Plug	Protection class III/safety extra-low voltage
Rated Input	30.5 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No
Light Source	LED, Light source changeable TC
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	80
Rated Luminous Flux	4320 lm
Luminous Efficiency	141.6 lm/W
Rated Angle of Reflection	120 Degree
UGR	22
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	295 mm
Width	1195 mm
Height	32 mm

Cut Out Length	270 mm
Cutout L x W	270 x 1170 mm
Cut Out Width	1170 mm
Product weight	1693 g
Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 40
IK Protection Class	IK03
Max. units per MCB B10	10 PCS
Max. units per MCB B16	16 PCS
Max. units per MCB C10	17 PCS
Max. units per MCB C16	26 PCS
Life Time L80 / B50	50000 h
Switching Cycles	100000
Power Consumption	31 kWh/1000h
EEL	E

