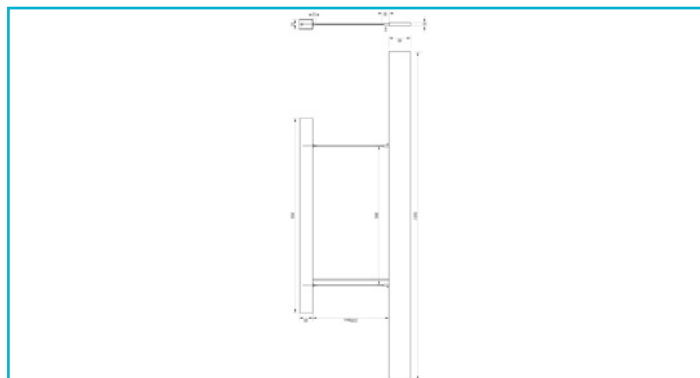
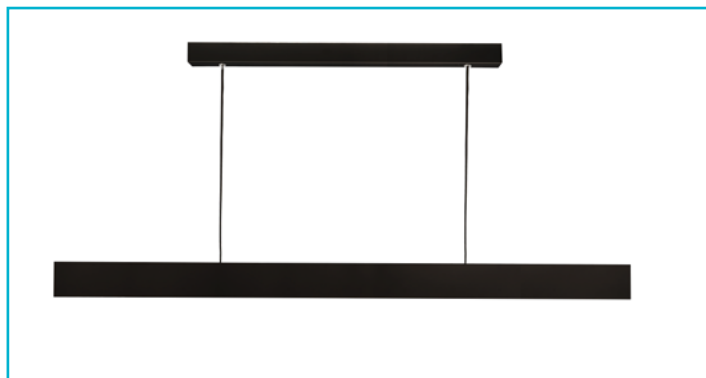


Pendant lamp
Apollon, 42 W, DIM, 2,700 K, black


The APOLLON narrow, puristic pendant lamp fits into almost any environment seamlessly and in addition to the elegant visual design also delivers a rich warm white light. The APOLLON is available in two different sizes with a matte surface in black and white.

Special features

- Especially narrow design
- High colour rendering
- Suspended mounting up to max. 3,000 mm
- Dimmable

Housing Material	Aluminium
Housing Color	Black
Surface structure	Matt
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	42 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	200-250 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	2700 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	2475 lm
Luminous Efficiency	58.9 lm/W
Rated Angle of Reflection	110 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	1464 mm
---------------	---------

Width	8 mm
Height	80 mm
Base length	850 mm
Base L x W x H	850 x 35 x 48 mm
Base width	35 mm
Base height	48 mm
Pendulum Length max.	3000 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-30 to 60 °C
IP Protection Class	IP 20
Max. units per MCB B10	18 PCS
Max. units per MCB B16	29 PCS
Max. units per MCB C10	30 PCS
Max. units per MCB C16	48 PCS

Life Time L70 / B50	50000 h
Switching Cycles	25000
Power Consumption	42 kWh/1000h
EEI	F

