


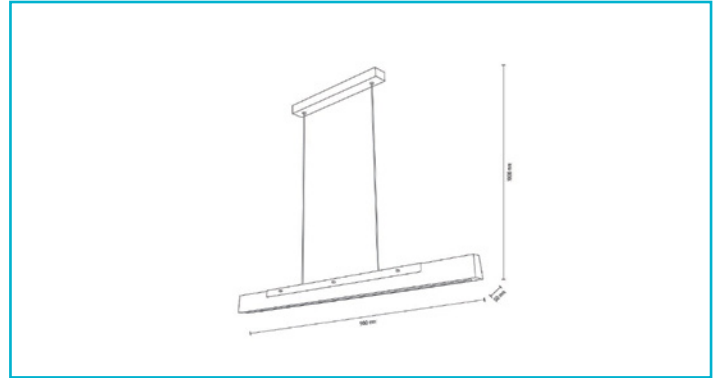

The MADERA series is made from premium European oak and captivates with its modern design and mix of materials in private living areas, hotels, restaurants and many more places too. The elegant MADERA lights distribute their powerful warm white light in every room and also cut an excellent figure providing functional and high-quality lighting at reception desks and elsewhere.

#### Special features

- Modern design, exclusive to Deko-Light
- Manufactured in Europe from quality class A oak
- FSC-certified oak raw material
- Environmentally friendly packaging
- Dimmable using touch sensor

|                                         |                                           |                            |              |
|-----------------------------------------|-------------------------------------------|----------------------------|--------------|
| <b>Housing Material</b>                 | Wood, Iron                                | <b>IP Protection Class</b> | IP 20        |
| <b>Housing Color</b>                    | Brown, Black                              | <b>Life Time L70 / B50</b> | 30000 h      |
| <b>Protection Class</b>                 | Protection class II/protective insulation | <b>Switching Cycles</b>    | 15000        |
| <b>Rated Input</b>                      | 16 W                                      | <b>Power Consumption</b>   | 16 kWh/1000h |
| <b>Rated Input Voltage Frequency</b>    | 220-240 V/AC 50 / 60 Hz                   | <b>EEL</b>                 | F            |
| <b>Power Supply Unit incl.</b>          | Yes                                       |                            |              |
| <b>Connection Type</b>                  | Clamp                                     |                            |              |
| <b>Dimmable</b>                         | Yes                                       |                            |              |
| <b>Control technology</b>               | Touch-Sensor                              |                            |              |
| <b>Motion Detector</b>                  | No                                        |                            |              |
| <b>Light Source</b>                     | LED, Light source not changeable          |                            |              |
| <b>Color Temperature</b>                | 3000 K                                    |                            |              |
| <b>Colour Consistency</b>               | 6 SDCM                                    |                            |              |
| <b>Colour Rendering Index (Ra)</b>      | 80                                        |                            |              |
| <b>Rated Luminous Flux</b>              | 1190 lm                                   |                            |              |
| <b>Rated Angle of Reflection</b>        | 120 Degree                                |                            |              |
| <b>Distribution Characteristic 120°</b> | DLS                                       |                            |              |
| <b>Light Exit Surfaces</b>              | 1                                         |                            |              |
| <b>Light characteristics</b>            | Direct                                    |                            |              |
| <b>Light direction</b>                  | Below                                     |                            |              |
| <b>Length</b>                           | 900 mm                                    |                            |              |
| <b>Width</b>                            | 50 mm                                     |                            |              |
| <b>Height</b>                           | 60 mm                                     |                            |              |
| <b>Base length</b>                      | 370 mm                                    |                            |              |
| <b>Base width</b>                       | 50 mm                                     |                            |              |
| <b>Base height</b>                      | 30 mm                                     |                            |              |
| <b>Pendulum Length max.</b>             | 1000 mm                                   |                            |              |
| <b>Working Temperature</b>              | -25 to 45 °C                              |                            |              |
| <b>Storage Temperature</b>              | -25 to 60 °C                              |                            |              |