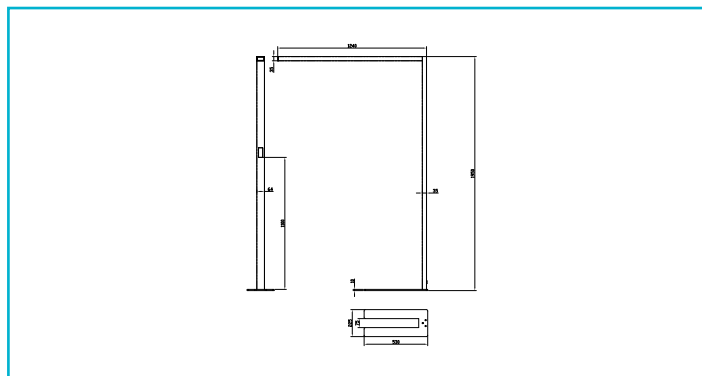



Special features


- Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 ≤ 3,000 cd/m²])
- Eligible for BEG German federal funding for energy-efficient buildings
- Ideal for high-quality illumination of individual workstations
- Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables
- Direct and indirect light can be dimmed and switched separately using touch panel

Housing Material	Aluminium
Housing Color	Light grey
Material of Lens	Polycarbonate - PC
Suitable for Computer Workstations	Yes
Mounting Location	Inside
Technical Description	• Indirect light (top): 50 W/7,1 lm (2,7 K), 7,5 lm (6,5 K)/CRI > 80/110 degrees • Direct light (bottom): 25 W/1,7 lm (2,7 K), 2 lm (6,5 K)/CRI > 95/50 degrees • 24 GHz presence detector
Functions	Emergency power capable
Protection Class	Protection class I/ protective grounding
Rated Input	80 W
Rated Power Consumption Standby	0.5 W
Rated Power Consumption Network Standby	0.5 W
Rated Input Voltage Frequency	180-264 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Primary Connection	Safety plug
Primary Cable Length	2.5 m
Connection Type According to Standard	Typ X
Dimmable	Yes
Control	Touch-Sensor
Motion Detector	Yes
Kind of Motion Detector	Presence detector
Detection Distance	3-3 m
Angle of Detection	75 Degree
Motion detector changeable	Yes
Adjustable brightness threshold	No
Adjustable follow-up time	No

Voltage range DC	180-240 V/DC
Voltage range emergency lighting	180-240 V/DC
EOFI	100 %

Light Source	LED, Light source changeable TC
Lightcolor	Warm white/neutral white/cold white
Colour Temperature	2700-6500 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	95
Rated Luminous Flux	9000/9800 lm
Luminous Efficiency	122.5 lm/W
Rated Angle of Reflection	120 Degree
Rated Angle of Reflection 2	50 Degree
UGR	6

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below



Standing lamp
Office Three Pro, Motion, 80 W, DIM, 2,700-6,500 K, light grey

Length	1240 mm
Width	64 mm
Height	1950 mm
Base length	530 mm
Base L x W x H	530 x 225 x 10 mm
Base width	225 mm
Base height	10 mm
Product weight	11740 g
Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 20
IK Protection Class	IK06
Inrush Current max.	17.6 A / 280 µs
Max. units per MCB B10	13
Max. units per MCB B16	21
Max. units per MCB C10	20
Max. units per MCB C16	32
Life Time L80 / B10	50000 h
Life Time L80 / B50	50000 h
Switching Cycles	100000
Power Consumption	80 kWh/1000h
Energy Efficiency Class Lightsources	This product contains light sources of energy efficiency classes D and F.