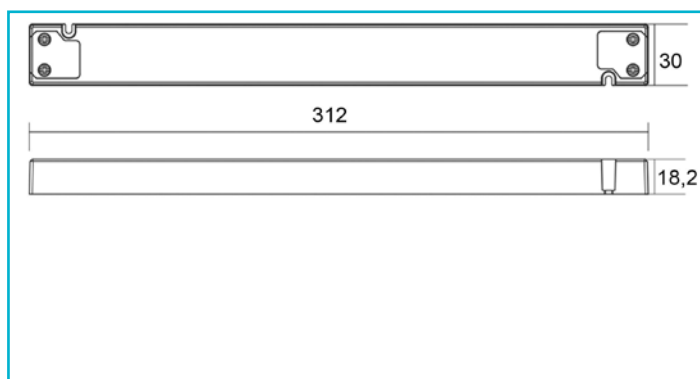
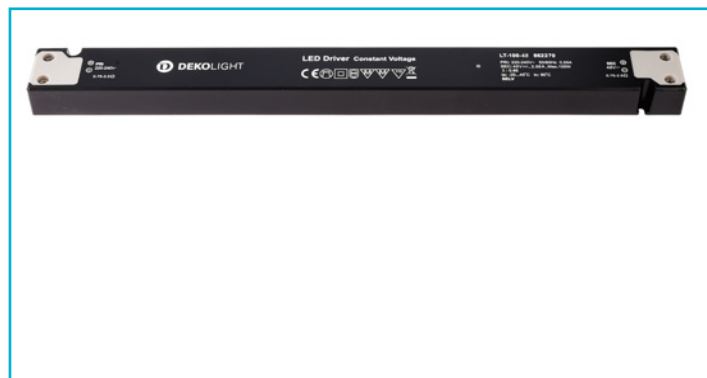


Power supply unit (CV, DC)
LONG-FLAT, CV, LT-100-48


The power supply unit series with up to 240 W and a cross-section of just 32 x 23 mm has impressive output potential under its „bonnet“! This power supply unit is therefore suitable for most ceiling coves, shadow gaps or any other installation situations where space is limited.

Special features

- Ideal for concealed mounting in ceiling coves
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	100 W
Output Voltage	48 V/DC
Output Current	0-2080 mA
Power Factor	0.95

Max. units per MCB B10	3
Max. units per MCB B16	5
Max. units per MCB C10	7
Max. units per MCB C16	11
Inrush Current max.	40 A / 900 µs
Capacitive Load	451.2 nF
Reference Point Tc	90 °C
Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 45 °C
IP Protection Class	IP 20

Life Time	30000 h
------------------	---------

Length	312 mm
Width	30 mm
Height	18.2 mm
Product weight	175 g

