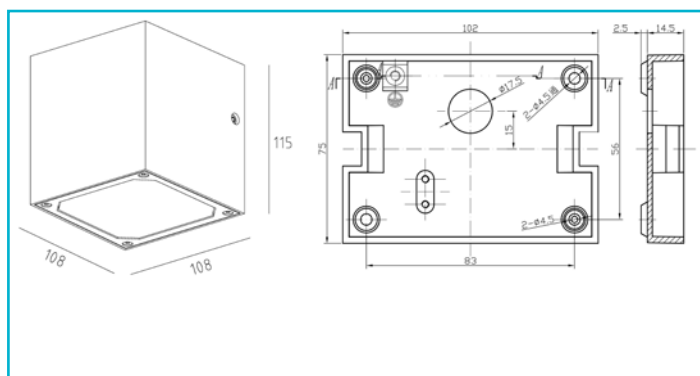


Surface-mounted wall light
Cubodo 2 single, 8.5 W, 3,000 K, dark grey


Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Glass
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Functions	Nightsaver
Protection Class	Protection class I/ protective grounding
Rated Input	8.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	600 lm
Luminous Efficiency	70.6 lm/W
Rated Angle of Reflection	19 Degree
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	108 mm
Width	108 mm
Height	115 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 54
IK Protection Class	IK04
Max. units per MCB B10	32 PCS
Max. units per MCB B16	51 PCS
Max. units per MCB C10	51 PCS
Max. units per MCB C16	81 PCS

Life Time L70 / B50	30000 h
Switching Cycles	100000
Power Consumption	9 kWh/1000h
EEL	G

