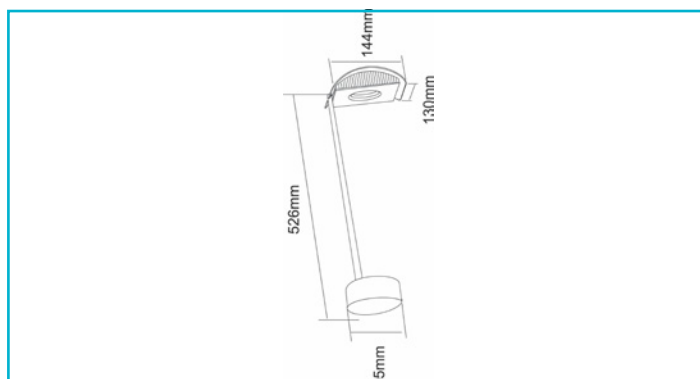
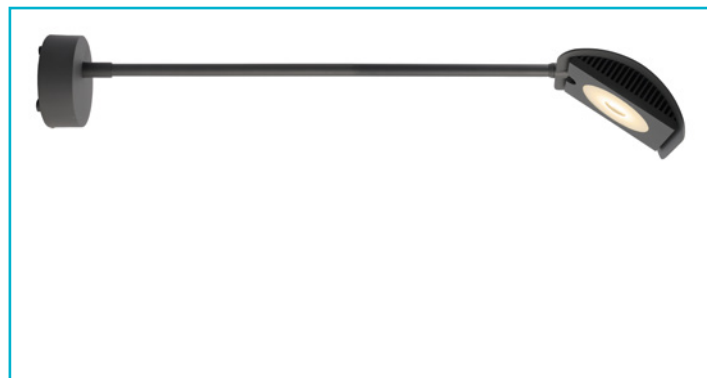


Display light
Atis II, 15 W, DIM, 3,000 K, black


When it comes to illuminating signs, façades, billboards or images, display lights are the perfect choice. They are easy to install, exceptionally efficient and suit almost any environment thanks to their timeless design. With corresponding IP protection, they can also be used outdoors, purposefully providing an additional lighting source in such environments.

Special features

- rotatable and swivelling lamp head

Housing Material	Aluminium
Housing Color	Black
Material of Lens	Glass
Through Wiring possible	Yes
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Rated Input	15 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	1150 lm
Luminous Efficiency	76.7 lm/W
Rated Angle of Reflection	100 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	90 Degree
Light Exit Surfaces	1
Light characteristics	Direct

Light direction	Below
Length	526 mm
Width	144 mm
Base length	95 mm
Base height	40 mm
Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 40 °C
IP Protection Class	IP 65

Life Time L70 / B50	50000 h
Switching Cycles	15000
Power Consumption	15 kWh/1000h
Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class F.

