


Power supply unit (CV, DC) dimmable
Long-Flat, DIM, CV, 48 V 50-150 W

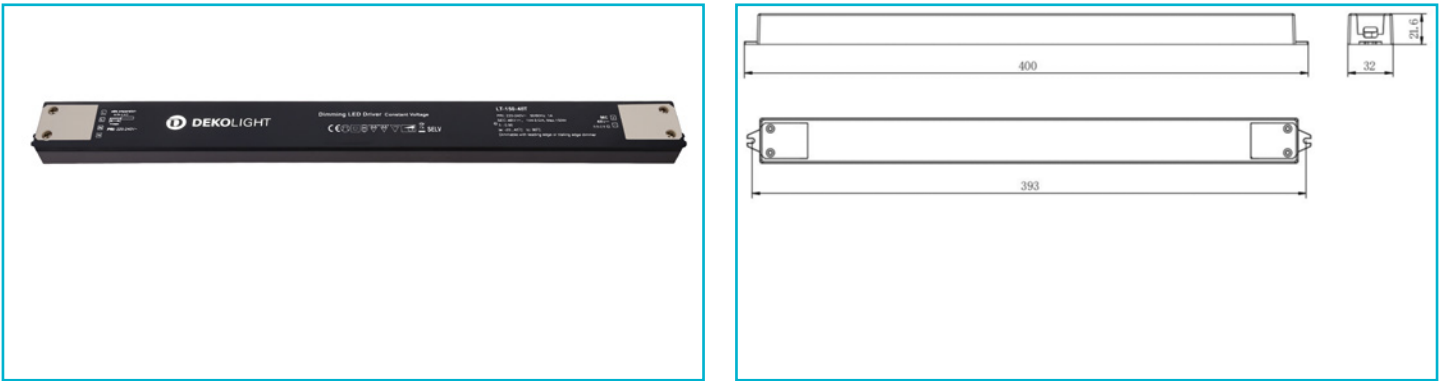

- Special features**
- dimmable with leading/trailing edge phase dimmers
 - ideal for retrofitting existing installations, as primarily dimmable with rotary/push-button dimmers [C-compatible]
 - long, compact design
 - not combinable with PWM dimmers such as RF, DMX, DALI, KNX
 - flicker-free
 - short-circuit and overload-proof
 - overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	50.0-150 W
Output Voltage	48 V/DC
Output Current	1040-3125 mA
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Number of Channels	1
Power Factor	0.95
Max. units per MCB B10	2
Max. units per MCB B16	4
Max. units per MCB C10	5
Max. units per MCB C16	9
Inrush Current max.	30 A / 300 µs
Reference Point Tc	90 °C
Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20
Switching Cycles	100000
Life Time	50000
Length	400 mm
Width	32 mm
Height	21.6 mm

Product weight 318 g

