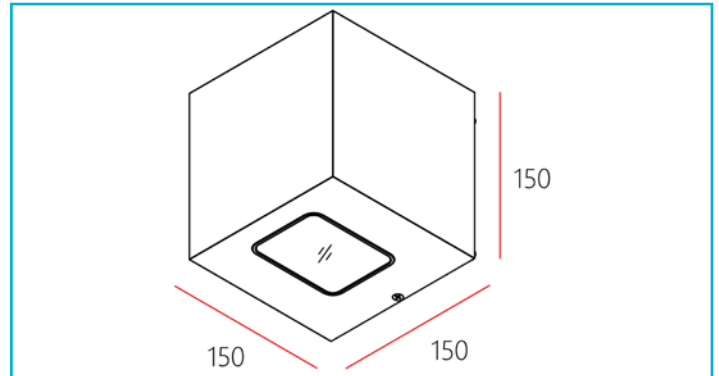


**Surface-mounted wall light**  
**Jabbah, 13 W, 3,000 K, grey**


The square JABBAH uses integrated COB LEDs in warm white, emitting its light asymmetrically at an angle of 75° onto walls in a cone of illumination - in a simple variant providing 915 lumens, as an UP AND DOWN version providing a total of 1,850 lumens. In addition, the two-sided JABBAH can be dimmed to 60 % luminous flux using a dip switch, if a more subtle light is desired.

**Special features**

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- Incl. wall spacer for surface-mounted cable entry
- Power adjustable in 2 stages (model-dependent)

|                                      |                                             |
|--------------------------------------|---------------------------------------------|
| <b>Housing Material</b>              | Aluminium                                   |
| <b>Housing Color</b>                 | Dark grey                                   |
| <b>Through Wiring possible</b>       | Yes                                         |
| <b>Mounting Type</b>                 | Top mounting                                |
| <b>Mounting Location</b>             | Outside                                     |
| <b>Mounting Area</b>                 | Wall installation                           |
| <b>Ultraviolet resistance</b>        | Yes                                         |
| <b>Protection Class</b>              | Protection class I/<br>protective grounding |
| <b>Rated Input</b>                   | 13 W                                        |
| <b>Rated Input Voltage Frequency</b> | 220-240 V/AC 50 / 60 Hz                     |
| <b>Power Supply Unit incl.</b>       | Yes                                         |
| <b>Number of Cable Entries</b>       | 2 PCS                                       |
| <b>Dimmable</b>                      | No                                          |
| <b>Motion Detector</b>               | No                                          |

|                            |              |
|----------------------------|--------------|
| <b>Working Temperature</b> | -20 to 40 °C |
| <b>Storage Temperature</b> | -20 to 60 °C |
| <b>IP Protection Class</b> | IP 65        |
| <b>Life Time L70 / B50</b> | 50000 h      |
| <b>Switching Cycles</b>    | 15000        |
| <b>Power Consumption</b>   | 13 kWh/1000h |
| <b>EEI</b>                 | G            |

|                                         |                                  |
|-----------------------------------------|----------------------------------|
| <b>Light Source</b>                     | LED, Light source not changeable |
| <b>Color Temperature</b>                | 3000 K                           |
| <b>Colour Consistency</b>               | 6 SDCM                           |
| <b>Colour consistency light source</b>  | 6 SDCM                           |
| <b>CRI (Ra)</b>                         | 80                               |
| <b>Rated Luminous Flux</b>              | 915 lm                           |
| <b>Luminous Efficiency</b>              | 70.4 lm/W                        |
| <b>Rated Angle of Reflection</b>        | 75 Degree                        |
| <b>Distribution Characteristic 120°</b> | DLS                              |

|                              |        |
|------------------------------|--------|
| <b>Light Exit Surfaces</b>   | 1      |
| <b>Light characteristics</b> | Direct |
| <b>Light direction</b>       | Below  |

|               |        |
|---------------|--------|
| <b>Length</b> | 150 mm |
| <b>Width</b>  | 150 mm |
| <b>Height</b> | 150 mm |

