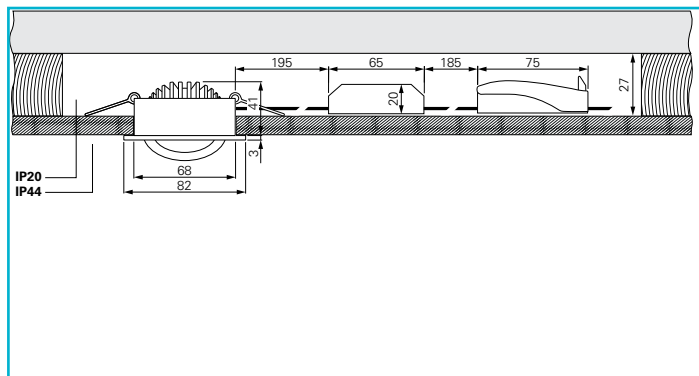


**Recessed Spotlight**  
**Dione IP44, 8.5 W, DIM, 2,700 K, chrome**

**Special features**

- Low installation depth
- Splash-proof [downwards after installation]
- Incl. dimmable power supply unit and connection box
- Feed-through wiring possible
- Ideal renovation solution
- Light and power supply unit with intermediate connector


|                                        |                                               |
|----------------------------------------|-----------------------------------------------|
| <b>Housing Material</b>                | Aluminium                                     |
| <b>Housing Color</b>                   | Chrome                                        |
| <b>Colour of Lens</b>                  | White                                         |
| <b>Through Wiring possible</b>         | Yes                                           |
| <b>Mounting Type</b>                   | Installation mounting                         |
| <b>Mounting Location</b>               | Inside                                        |
| <b>Mounting Area</b>                   | Ceiling installation                          |
| <b>Protection Class</b>                | Protection class II/<br>protective insulation |
| <b>Rated Input</b>                     | 8 W                                           |
| <b>Rated Power Consumption Standby</b> | 0.5 W                                         |
| <b>Rated Input Voltage Frequency</b>   | 220-240 V/AC 50 / 60 Hz                       |
| <b>Power Supply Unit incl.</b>         | Yes                                           |
| <b>Primary Connection</b>              | Connection box IP20                           |
| <b>Dimmable</b>                        | Yes                                           |
| <b>Control</b>                         | Leading-edge dimmer,<br>Trailing-edge dimmer  |
| <b>Motion Detector</b>                 | No                                            |

|                                         |                                     |
|-----------------------------------------|-------------------------------------|
| <b>Light Source</b>                     | LED, Light source not<br>changeable |
| <b>Color Temperature</b>                | 2700 K                              |
| <b>Colour Consistency</b>               | 5 SDCM                              |
| <b>Colour consistency light source</b>  | 5 SDCM                              |
| <b>CRI (Ra)</b>                         | 80                                  |
| <b>Rated Luminous Flux</b>              | 750 lm                              |
| <b>Luminous Efficiency</b>              | 88.2 lm/W                           |
| <b>Rated Angle of Reflection</b>        | 36 Degree                           |
| <b>Light Distribution</b>               | Symmetric                           |
| <b>Distribution Characteristic 120°</b> | DLS                                 |

|                              |           |
|------------------------------|-----------|
| <b>Swivel Angle</b>          | 30 Degree |
| <b>Light Exit Surfaces</b>   | 1         |
| <b>Light characteristics</b> | Direct    |

|                                    |              |
|------------------------------------|--------------|
| <b>Light direction</b>             | Below        |
| <b>Height</b>                      | 44 mm        |
| <b>Diameter</b>                    | 82 mm        |
| <b>Installation Depth</b>          | 41 mm        |
| <b>Required Installation Depth</b> | 27 mm        |
| <b>Mounting Surface Thickness</b>  | 9-13 mm      |
| <b>Cut Out Diameter</b>            | 68 mm        |
| <b>Product weight</b>              | 163 g        |
| <b>Working Temperature</b>         | -20 to 40 °C |
| <b>Storage Temperature</b>         | -20 to 40 °C |
| <b>IP Protection Class</b>         | IP 20, IP 44 |
| <b>Inrush Current max.</b>         | 5 A / 100 µs |
| <b>Max. units per MCB B10</b>      | 90           |
| <b>Max. units per MCB B16</b>      | 145          |
| <b>Max. units per MCB C10</b>      | 100          |
| <b>Max. units per MCB C16</b>      | 160          |

|                            |         |
|----------------------------|---------|
| <b>Life Time L70 / B50</b> | 50000 h |
| <b>Switching Cycles</b>    | 25000   |



Art.-Nr. 565391



Recessed Spotlight  
Dione IP44, 8.5 W, DIM, 2,700 K, chrome

---

|                   |             |
|-------------------|-------------|
| Power Consumption | 9 kWh/1000h |
| EEI               | E           |