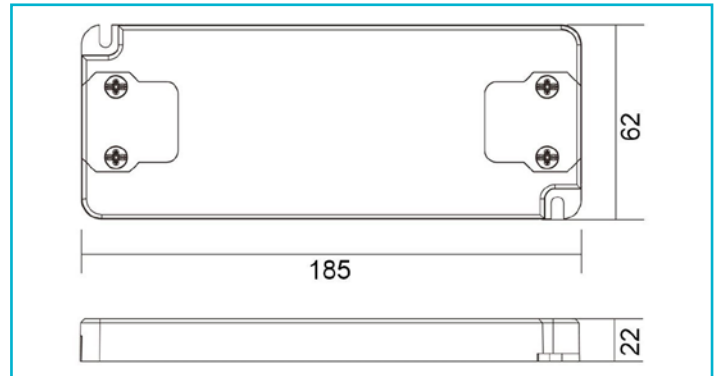


Power supply unit (CV, DC)
FLAT, CV, UT 24 V/50 W
**Special features**

- Ideal for concealed mounting in ceiling coves
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	50 W
Output Voltage	24 V/DC
Output Current	0-2100 mA
Power Factor	0.95

Max. units per MCB B10	5
Max. units per MCB B16	9
Max. units per MCB C10	12
Max. units per MCB C16	19
Inrush Current max.	60 A / 300 µs
Capacitive Load	604.5 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20

Life Time	30000 h
------------------	---------

Length	185 mm
Width	62 mm
Height	22 mm
Product weight	233 g

